



CONNECTILED
SPÉCIALISTE EN ÉCLAIRAGE LED

CATALOGUE ELECMAN

 **elecman**

EDITION 2018

www.connectiled.com



LIGHTING FIXTURES

CEILING RECESSED

N



FOC
009



MAN
011



COBBY
012



RINGO
013



STEAM
015



ESSE
016



LOOP
017

N



MAGNUM
019



PETIT
023



NEST
025



ROT
027



SWING
029

N



SIXTY
031

N



MOON
033



TANGO
035

N



SINDRA
037

N



FLAT
039

SURFACE



FLAT SURFACE
043



BLOK
045

N



SURF
047



RAIN
049

N



KAMEL
051

N



BOL
053

N




PASCAL
054

N



SURF XXL
055



LINE
059



WIDE
061

N



PUKHET
063



ZOOM SURFACE
065

TRACK LIGHT



ZOOM
067



TRACK
071

PENDANT



ZOOM PENDANT
073



BELLY
075



IRIS
079



UP
081

WALL LIGHT



PIXEL
083



MIRAL
085



TULIP
087



WALLY
089



MASK
091



ROOK LED
093



ALPHA
097



KAT
099

FLOOR LIGHT



PIKA
101

INDUSTRIAL



HYDRA
103



HYDRA LED
105



FLASH
108



STAR
110



TUCK
111



VEGA
115



PLANET 2
117

TABLE LAMP



CLAP
119

LAMPS



PAR 16
121



VINTAGE
122



STANDARD
123



SPHERICAL E27
124



SPHERICAL E14
125



CANDLE
126



DECO CANDLE
127



ST64
128



GLOBE
128



TUBULAR
129



PAR
130



REFLECTOR
131



LINEAR 78
132



LINEAR 118
133



G9
134



G4
135



G6,35
135



TUBE
137

LED STRIP LIGHTS AND ACCESSORIES



LED STRIP
139



PROFILES
140



CONTROLLER
141



LED POWER SUPPLY
141

LIGHTING FIXTURES

Los lúmenes indicados en todas nuestras luminarias
son lúmenes de emisión real

The indicated lumen data of all our luminaires are nett
lumen output.

Les lumens indiqués sur tous nos luminaires, sont
d'émission réelle.

I lumen indicati nelle nostre luminarie sono di
emissione reale

Die angegebenen Lumenwerte aller unserer Leuchten
stellen den tatsächlichen Leuchten-Lichtstrom bzw.
Netto-Lumenwerte dar.



—
CEILING
RECESSED
—

FOC



FOC


	W	K	Lm	mA	
30750083	8W	3000K	640	180	1/30
30750084	8W	4000K	680	180	1/30



220-240 V
50-60 Hz
CRI >80



3 YEARS
GUARANTEE



- Niquel Satinado / Negro - Por favor consultar
- Nickel Satin / Black - Please enquire
- Nickel Satin / Noir - Svp nous consulter



ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat




MAN





MAN Fix

	W	Colour	
30340010	MAX 50W	Matt White	1/100
30340020	MAX 50W	Nickel Satin	1/100




MAN Tilt

	W	Colour	
30340030	MAX 50W	Matt White	1/100
30340040	MAX 50W	Nickel Satin	1/100



MAN Tilt Square

	W	Colour	
30340050	MAX 50W	Matt White	1/100
30340060	MAX 50W	Nickel Satin	1/100

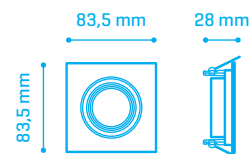

COBBY



COBBY

	W	K	Lm	mA	
30390073	7W	3000K	550	300	1/50
30390074	7W	4000K	575	300	1/50




220-240 V
50-60 Hz
CRI >80



ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat

Ø85 mm

59 mm




RINGO




RINGO 7W

	W	K	Lm	
30150073	7W	3000K	590	1/60
30150074	7W	4000K	650	1/60



RINGO 10W

	W	K	Lm	
30150103	10W	3000K	950	1/40
30150104	10W	4000K	1000	1/40
30300103	10W	3000K	950	1/40
30300104	10W	4000K	1000	1/40



MAT ALU + Thermal Plastic · COLOUR: Blanco Mate / Matt White / Blanc Mat



STEAM




STEAM

	W	K	Lm	mA	
30050073	7W	3000K	595	300	1/40



85-265 V
50-60 Hz
CRI >83




STEAM Square

	W	K	Lm	mA	
30060073	7W	3000K	595	300	1/40



85-265 V
50-60 Hz
CRI >83

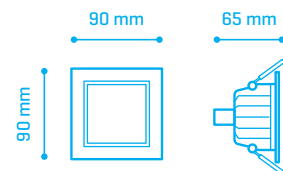

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat

ESSE



ESSE

	W	K	Lm	
30120063	6W	3000K	500	1/100
30120064	6W	4000K	530	1/100




175-240 V
50-60 Hz
CRI >80



ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat

Ø95 mm



51 mm




LOOP




LOOP

	W	
30350010	MAX 50W	1/100




LOOP Square

	W	
30350020	MAX 50W	1/100

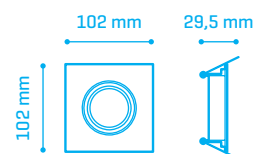

LOOP Rectangular

	W	
30350030	MAX 50W	1/50

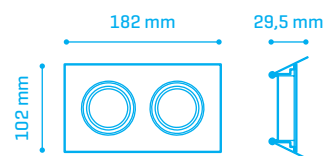

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



MAGNUM



MAGNUM 30W

		W	K	Lm	mA	Colour	
30570303W		30W	3000K	2400	750	Matt White	1/6
30570303N		30W	3000K	2400	750	Matt Black	1/6
30570304W		30W	4000K	2500	750	Matt White	1/6
30570304N		30W	4000K	2500	750	Matt Black	1/6
30580303W	DIM 1-10V	30W	3000K	2400	750	Matt White	1/6
30580303N	DIM 1-10V	30W	3000K	2400	750	Matt Black	1/6
30580304W	DIM 1-10V	30W	4000K	2500	750	Matt White	1/6
30580304N	DIM 1-10V	30W	4000K	2500	750	Matt Black	1/6
30760303W	DIM DALI / PUSH	30W	3000K	2400	750	Matt White	1/6
30760303N	DIM DALI / PUSH	30W	3000K	2400	750	Matt Black	1/6
30760304W	DIM DALI / PUSH	30W	4000K	2500	750	Matt White	1/6
30760304N	DIM DALI / PUSH	30W	4000K	2500	750	Matt Black	1/6




220-240 V
50-60 Hz
CRI >80



ACCESSORIES

30570300	Magnum Reflector 15°	1
30570301	Magnum Reflector 24°	1

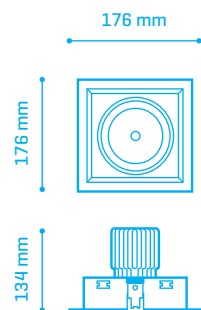



MAGNUM



MAGNUM 60W

		W	K	Lm	mA	Colour	
30570603W		60W	3000K	4800	1500	Matt White	1/4
30570603N		60W	3000K	4800	1500	Matt Black	1/4
30570604W		60W	4000K	5000	1500	Matt White	1/4
30570604N		60W	4000K	5000	1500	Matt Black	1/4
30580603W	⦿ DIM 1-10V	60W	3000K	4800	1500	Matt White	1/4
30580603N	⦿ DIM 1-10V	60W	3000K	4800	1500	Matt Black	1/4
30580604W	⦿ DIM 1-10V	60W	4000K	5000	1500	Matt White	1/4
30580604N	⦿ DIM 1-10V	60W	4000K	5000	1500	Matt Black	1/4
30760603W	⦿ DIM DALI / PUSH	60W	3000K	4800	1500	Matt White	1/4
30760603N	⦿ DIM DALI / PUSH	60W	3000K	4800	1500	Matt Black	1/4
30760604W	⦿ DIM DALI / PUSH	60W	4000K	5000	1500	Matt White	1/4
30760604N	⦿ DIM DALI / PUSH	60W	4000K	5000	1500	Matt Black	1/4




220-240 V
50-60 Hz
CRI >80



ACCESSORIES

30570300	Magnum Reflector 15°	1
30570301	Magnum Reflector 24°	1

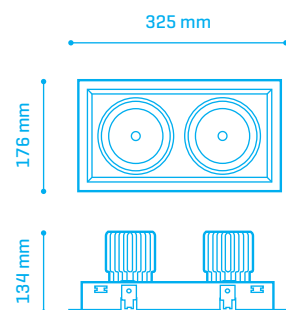




PETIT



PETIT

	W	K	Lm	mA	
30310023	2W	3000K	240	700	1/36


LED COB				100-240 V 50-60 Hz CRI >80		IP 44				 ON OFF > 40.000		 30.000 h.		 30°		 DRIVER INCL		 Ø 40 mm
------------	--	--	--	----------------------------------	--	----------	--	--	--	---------------------------	--	---------------	--	---------	--	--------------------	--	-------------



PETIT Square

	W	K	Lm	mA	
30320023	2W	3000K	240	700	1/36

LED COB				100-240 V 50-60 Hz CRI >80		IP 44				 ON OFF > 40.000		 30.000 h.		 30°		 DRIVER INCL		 40 X 40 mm
------------	--	--	--	----------------------------------	--	----------	--	--	--	---------------------------	--	---------------	--	---------	--	--------------------	--	----------------





PETIT Rectangular

	W	K	Lm	mA	
30320043	4W	3000K	480	700	1/36

LED COB				100-240 V 50-60 Hz CRI >80		IP 20		PF > 0,9				 ON OFF > 40.000		 30.000 h.		 30°		 DRIVER INCL		 75 X 38 mm
------------	--	--	--	----------------------------------	--	----------	--	-------------	--	--	--	---------------------------	--	---------------	--	---------	--	--------------------	--	----------------

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



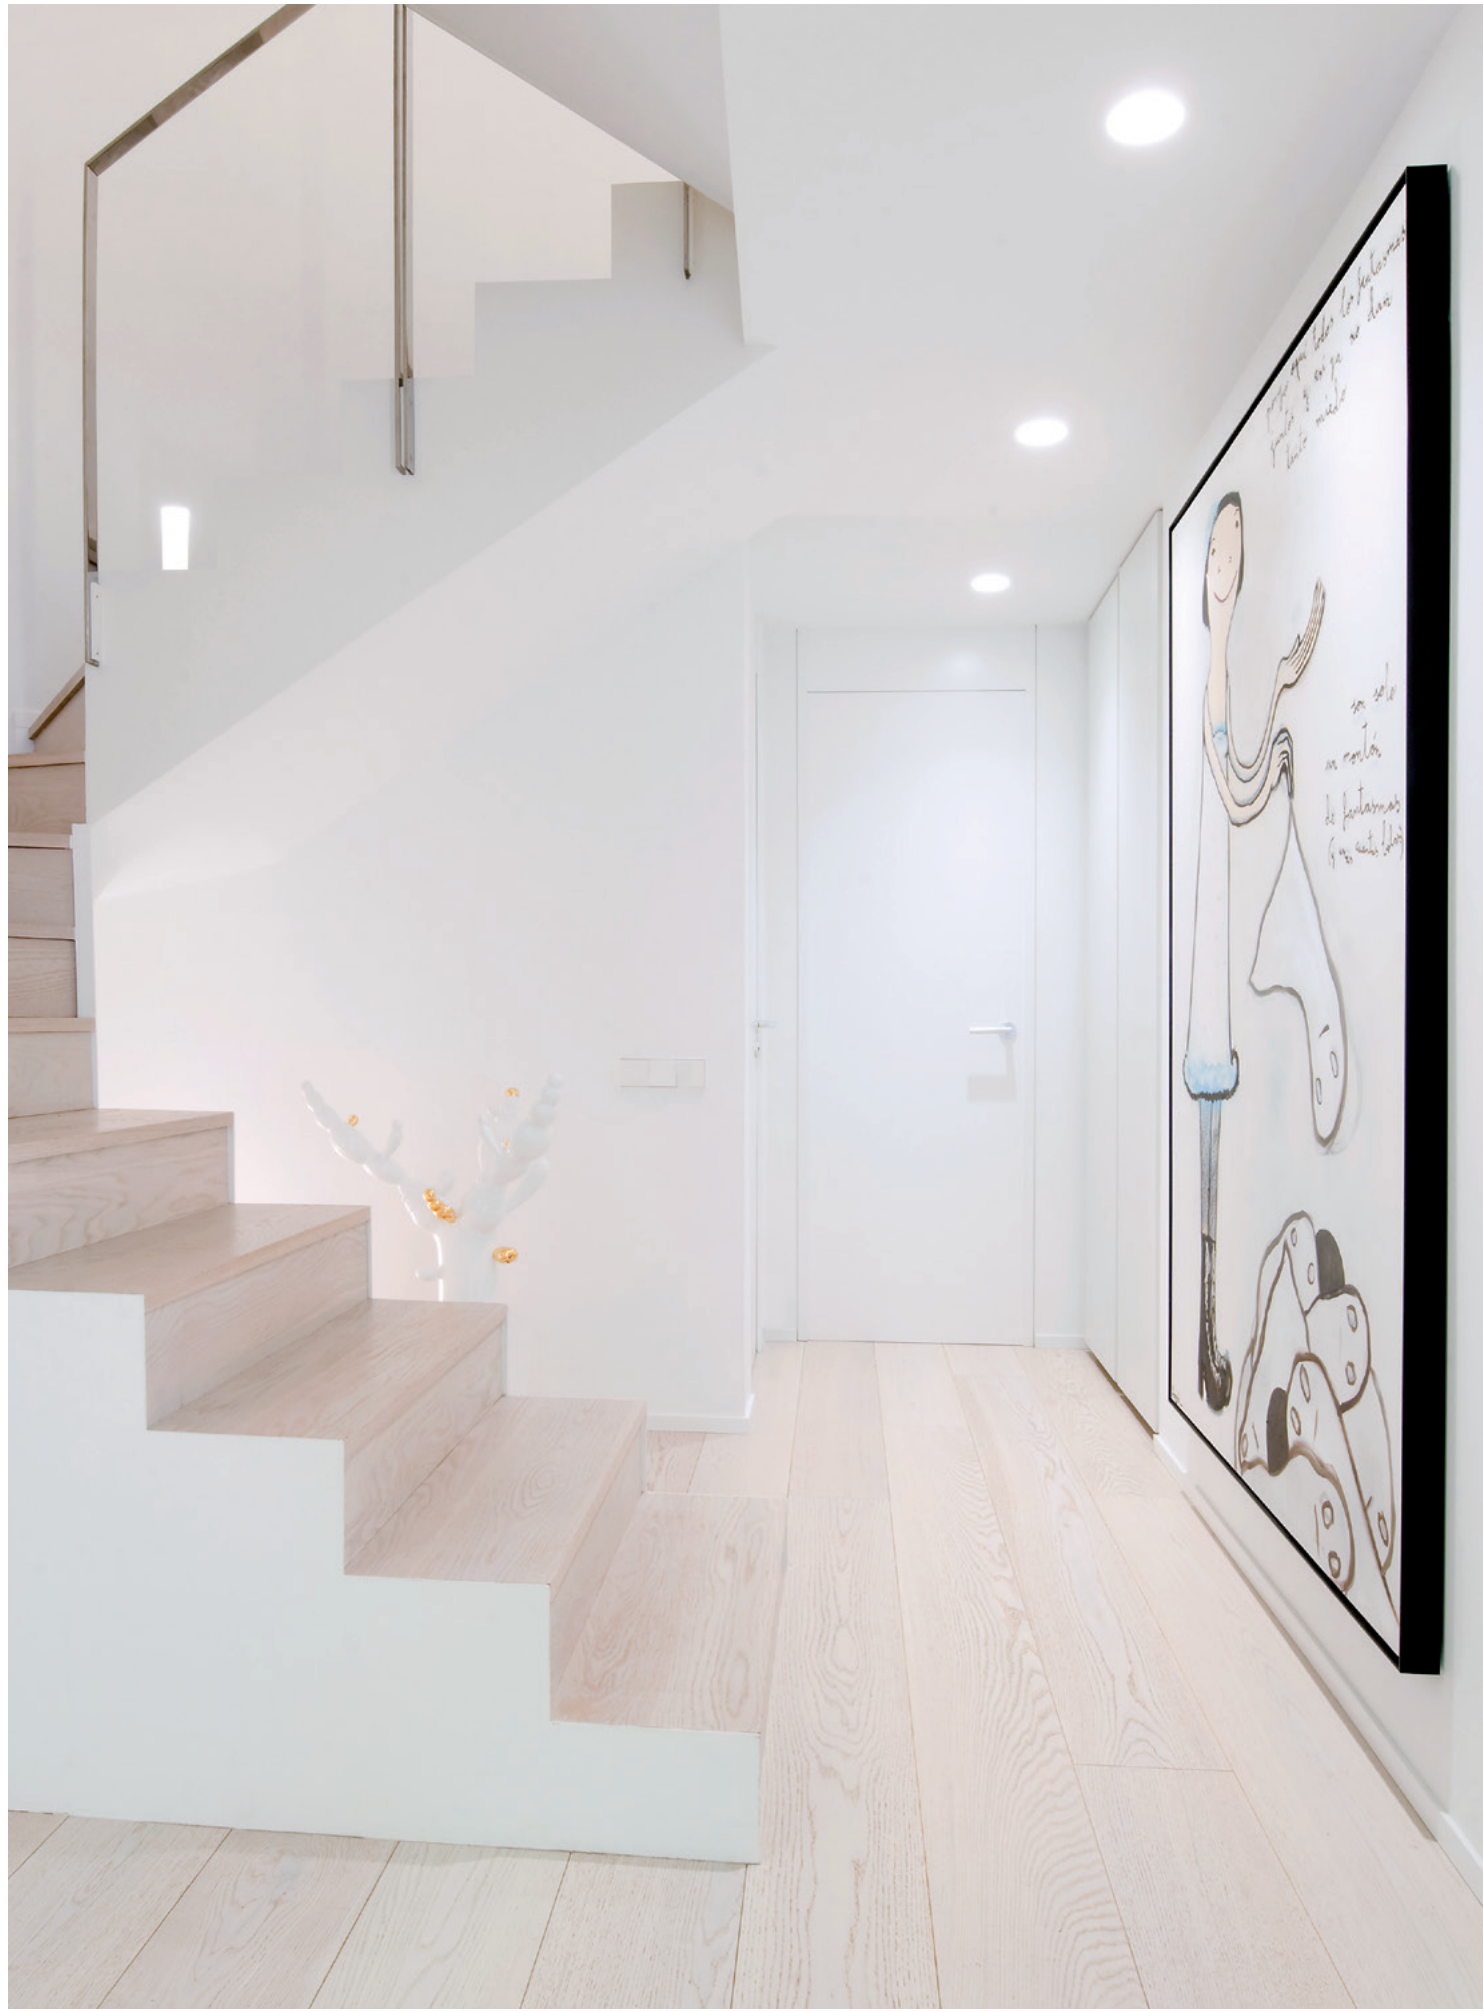

NEST



NEST

	W	
30330010	MAX 50W	1/50



220-240 V
50-60 Hz



NO INCL



GZ10-INCL



20



Ø90 mm

Ø96 mm



57 mm



NEST Asymmetric

	W	
30330020	MAX 50W	1/50



220-240 V
50-60 Hz



NO INCL



GZ10-INCL



20



Ø90 mm

Ø96 mm



76 mm



MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



ROT



ROT 7,5W

	W	K	Lm	mA	L1 x L2	
30420073	7,5W	3000K	850	200	Ø110 x 61 mm	1/50
30420074	7,5W	4000K	875	200	Ø110 x 61 mm	1/50



ROT 17W

	W	K	Lm	mA	L1 x L2	
30420173	17W	3000K	1650	450	Ø135 x 74,5 mm	1/30
30420174	17W	4000K	1750	450	Ø135 x 74,5 mm	1/30




ROT 32W

	W	K	Lm	mA	L1 x L2	
30420323	32W	3000K	3150	850	Ø181 x 103 mm	1/10
30420324	32W	4000K	3250	850	Ø181 x 103 mm	1/10



MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat

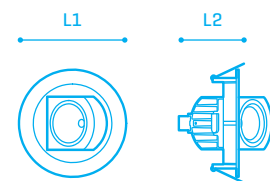




SWING



SWING

	W	K	Lm	mA	
30410354	35W	4000K	3850	850	1/8

LED COB				220-240 V 50-60 Hz CRI >80		IP 20		PF > 0,9		NO DIM		ON OFF > 10.000		30.000 h.		100°		50°		DRIVER INCL		245 X 158 mm
------------	--	--	--	----------------------------------	--	----------	--	-------------	--	--------	--	-----------------------	--	-----------	--	------	--	-----	--	----------------	--	--------------

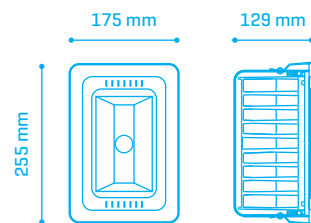

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



Photography: David Frutos - BISimages Architectural Photography - www.bisimages.com

SIXTY



SIXTY

		W	K	Lm	mA	
30140403		40W	3000K	3400	850	1/5
30140404		40W	4000K	3600	850	1/5
30770403	DIM 1-10V	40W	3000K	3400	850	1/5
30770404	DIM 1-10V	40W	4000K	3600	850	1/5
30780403	DIM DALI / PUSH	40W	3000K	3400	850	1/5
30780404	DIM DALI / PUSH	40W	4000K	3600	850	1/5



220-240 V
50-60 Hz
CRI >80



NO FLICKERING



DIMMABLE



> 20.000



40.000 h.




120°




DRIVER INCL

ACCESSORIES

30021000	Sixty Suspension Kit	1
30140000	Sixty Surface Kit	1

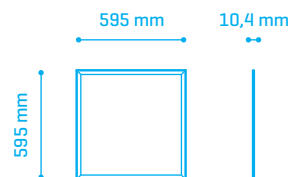

Sixty Suspension Kit



Sixty Surface Kit



ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



MOON



MOON 9W

	W	K	Lm	mA	L1 x L2	
30560093	9W	3000K	500	300	110 x 35 mm	1/50



220-240 V
50-60 Hz
CRI >80



MOON 24W

	W	K	Lm	mA	L1 x L2	
30560243	24W	3000K	1600	600	225 x 62 mm	1/10
30560244	24W	4000K	1700	600	225 x 62 mm	1/10




220-240 V
50-60 Hz
CRI >80



- Efecto bóveda - luz indirecta
- Vault effect - indirect lighting
- Effet dôme - lumière indirecte
- Effetto volta - luce riflessa
- Kuppel-effekt - indirekte beleuchtung



COLOUR: Blanco Mate / Matt White / Blanc Mat





TANGO



TANGO

	W	K	Lm	mA	
30100323	32W	3000K	2450	300	1/20
30100324	32W	4000K	2560	300	1/20

LED
SMD

|

|

100-240 V
50-60 Hz
CRI >80

IP
20

PF
> 0,9

NO DIM

ON
OFF
> 50.000


30.000 h.

120°

DRIVER
INCL

Ø205 mm

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat





SINDRA



SINDRA

	W	K	Lm	
30740183	18W	3000K	1900	1/40
30740184	18W	4000K	2050	1/40



150-265 V
50-60 Hz
CRI >80



> 0,8



NO DIM



> 25.000



30.000 h.




120°



DRIVER
INCL



Ø210 mm



PC · COLOUR: Blanco Mate / Matt White / Blanc Mat



FLAT



FLAT

	W	K	Lm	mA	L1 x L2	
30070063	6W	3000K	450	300	120 x 10 mm	1/40
30070064	6W	4000K	480	300	120 x 10 mm	1/40



110-265 V
50-60 Hz
CRI >80



	W	K	Lm	mA	L1 x L2	
30070183	18W	3000K	1350	300	225 x 20 mm	1/20
30070184	18W	4000K	1440	300	225 x 20 mm	1/20
30070186	18W	6000K	1440	300	225 x 20 mm	1/20



110-265 V
50-60 Hz
CRI >80




	W	K	Lm	mA	L1 x L2	
30070243	24W	3000K	1800	300	300 x 20 mm	1/20
30070244	24W	4000K	1920	300	300 x 20 mm	1/20



110-265 V
50-60 Hz
CRI >80



ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat






Vivienda en Valencia (Spain) | Design: Sanjuan Frascquet Arquitectos | Photography: Germán Cabo - www.germancabo.com



FLAT Square

	W	K	Lm	mA	
30080183	18W	3000K	1350	300	1/20
30080184	18W	4000K	1440	300	1/20
30080186	18W	6000K	1440	300	1/20



110-265 V
50-60 Hz
CRI >80



20

NO DIM


> 15.000

30.000 h.

120°

DRIVER
INCL

205 X 205 mm

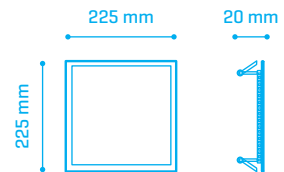

MAT ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat



SURFACE

FLAT SURFACE




FLAT Surface

	W	K	Lm	mA	
30090184	18W	4000K	1440	300	1/20
30090186	18W	6000K	1440	300	1/20

|
 |
 110-265 V
50-60 Hz
CRI >80

 > 15,000




FLAT Surface Square


	W	K	Lm	mA	
30270184	18W	4000K	1440	300	1/20
30270186	18W	6000K	1440	300	1/20

|
 |
 110-265 V
50-60 Hz
CRI >80

 > 15,000

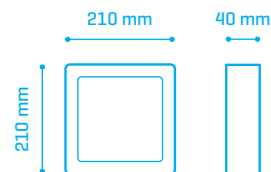

ALU · COLOUR: Blanco Mate / Matt White / Blanc Mat

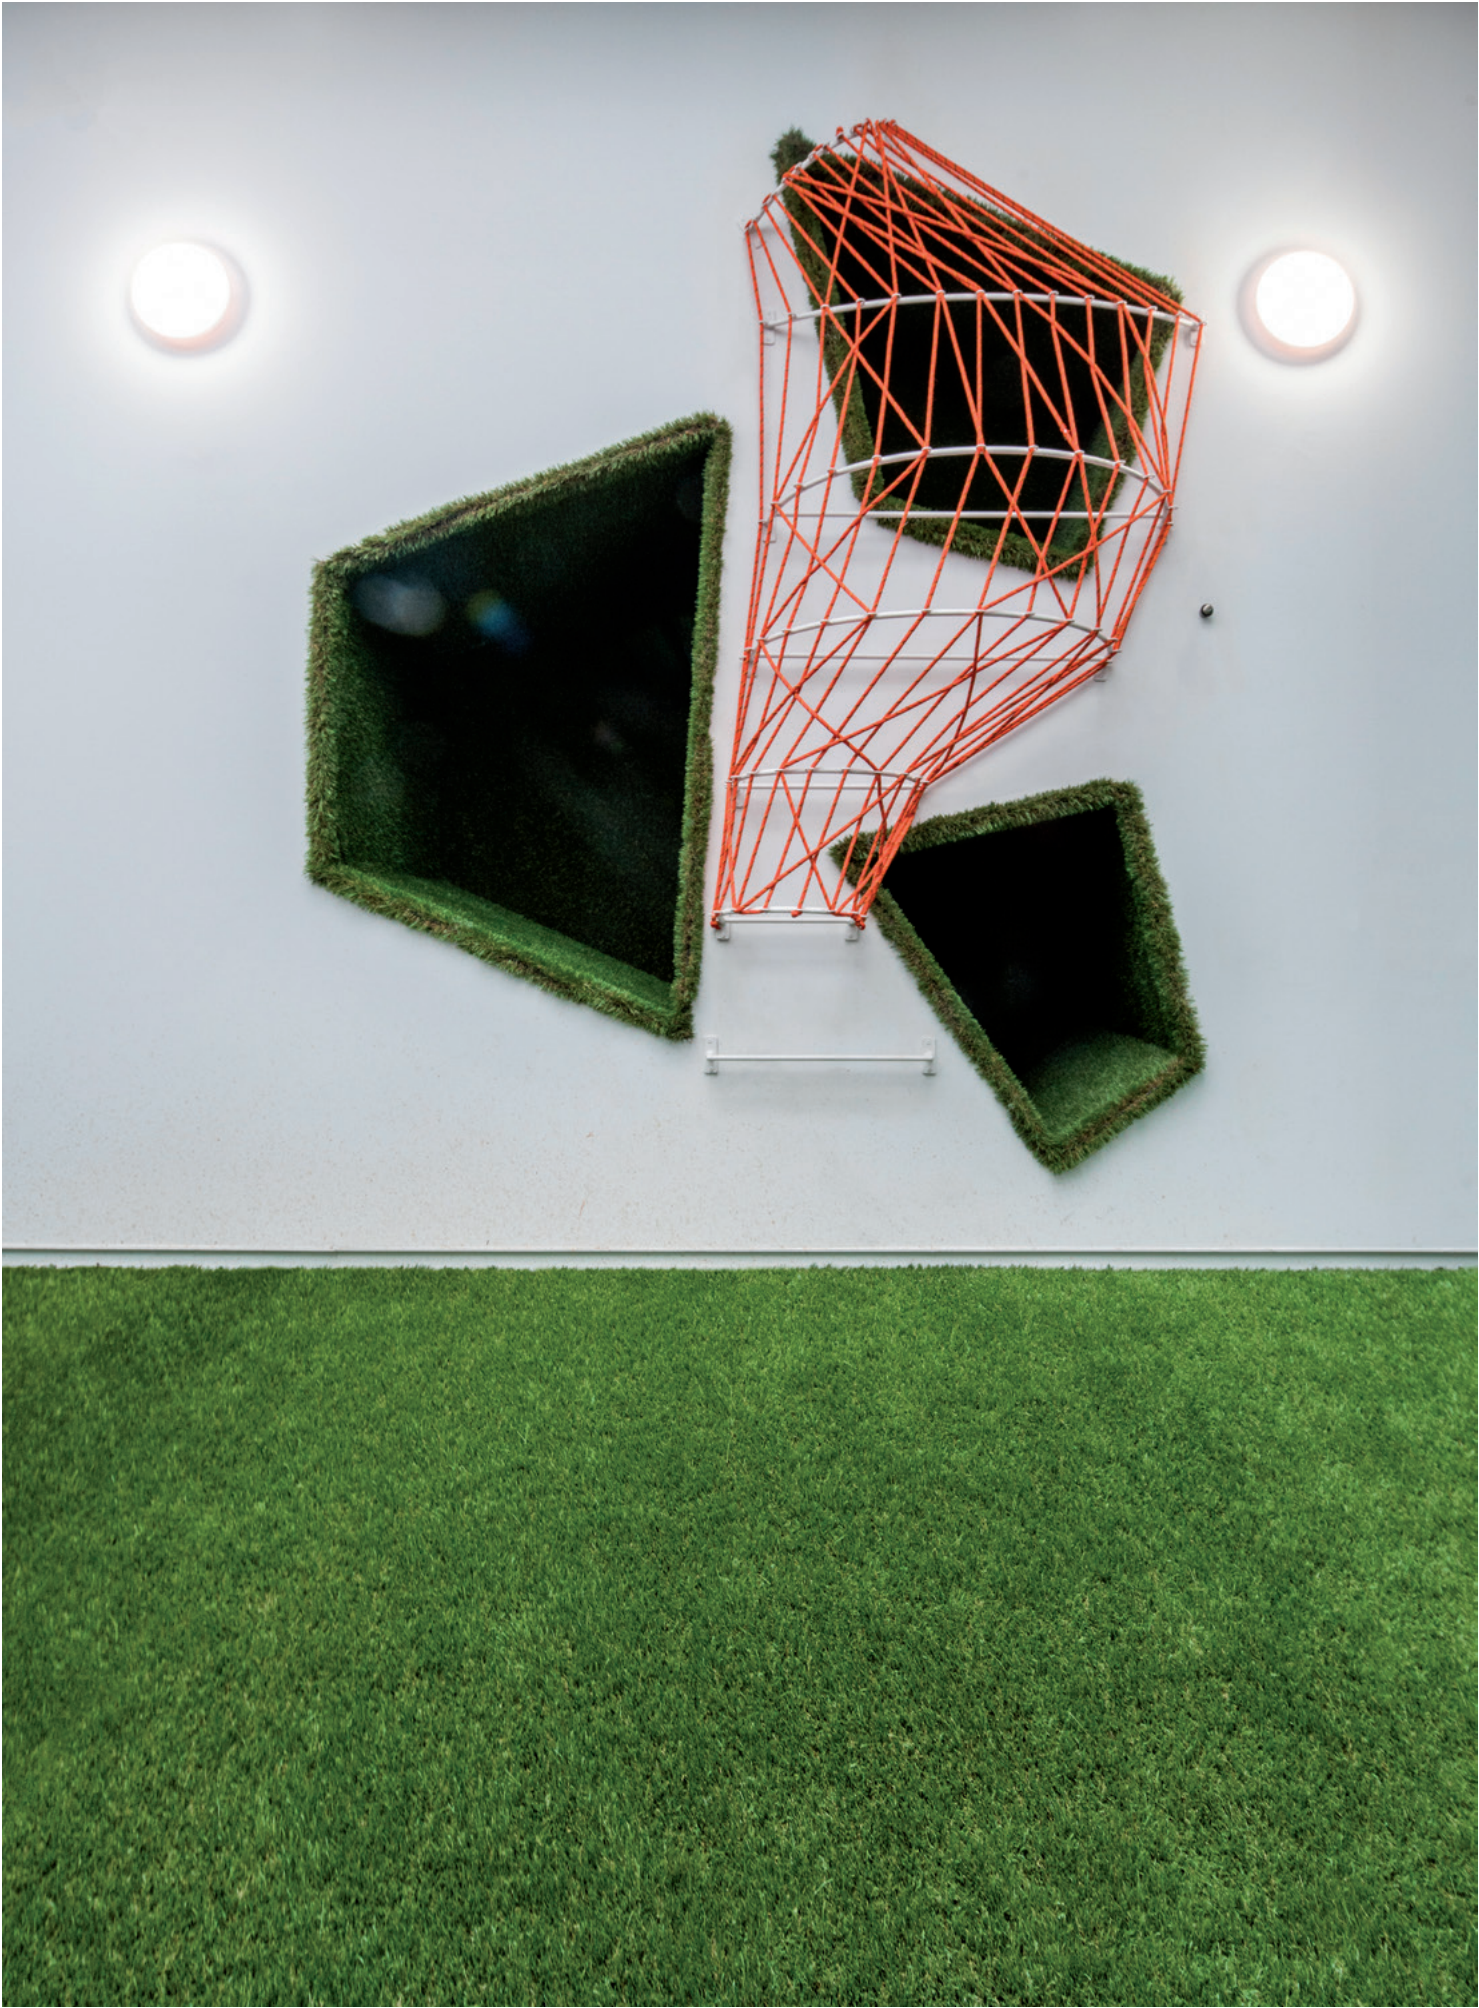


BLOK



BLOK Led Oval

	W	K	Lm	
30160074	7W	4000K	550	1/24


LED SMD		220-240 V 50-60 Hz CRI >80		IP 65		NO DIM		ON OFF > 10.000		25.000 h.		120°		DRIVER INCL
------------	--	----------------------------------	--	----------	--	--------	--	-----------------------	--	-----------	--	------	--	----------------

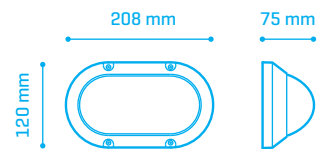

BLOK Led

	W	K	Lm	
30170074	7W	4000K	550	1/24

LED SMD		220-240 V 50-60 Hz CRI >80		IP 65		NO DIM		ON OFF > 10.000		25.000 h.		120°		DRIVER INCL
------------	--	----------------------------------	--	----------	--	--------	--	-----------------------	--	-----------	--	------	--	----------------





MAT ABS + PC · COLOUR: Blanco / White / Blanc



SURF



SURF

	W	K	Lm	L1 x L2	
30380143	14W	3000K	1100	Ø300 x 90 mm	1/10
30380144	14W	4000K	1150	Ø300 x 90 mm	1/10
30380183	18W	3000K	1400	Ø340 x 100 mm	1/10
30380184	18W	4000K	1450	Ø340 x 100 mm	1/10
30380243S	 24W	3000K	1560	Ø330 x 63 mm	1/10
30380244S	 24W	4000K	1680	Ø330 x 63 mm	1/10



175-240 V
50-60 Hz
CRI >80



SENSOR
OPTIONS



20



NO DIM



> 15.000




30.000 h.



120°



DRIVER
INCL



PMMA · COLOUR: Blanco Mate / Matt White / Blanc Mat



RAIN



RAIN

		W	K	Lm	
30030204		20W	4000K	1500	1/8
30040204		20W	4000K	1500	1/8

SMD

220-240 V
50-60 Hz
CRI >83

SENSOR
OPTIONS

IP
65

PF
> 0,95


NO DIM

ON
OFF
> 15.000

30.000 h.

120°

DRIVER
INCL





MAT PC · COLOUR: Blanco / White / Blanc



KAMEL



KAMEL



	W	K	Lm	Colour	L1 x L2	
30600204W	20W	4000K	1700	Matt White	225 x 70 mm	1/6
30600204A	20W	4000K	1700	Anthracite	225 x 70 mm	1/6
30600204WS	 20W	4000K	1700	Matt White	225 x 70 mm	1/6
30600204AS	 20W	4000K	1700	Anthracite	225 x 70 mm	1/6



220-240 V
50-60 Hz
CRI >80



KAMEL


	W	K	Lm	Colour	L1 x L2	
30600304W	30W	4000K	2500	Matt White	300 x 77 mm	1/5
30600304A	30W	4000K	2500	Anthracite	300 x 77 mm	1/5
30600304WS	 30W	4000K	2500	Matt White	300 x 77 mm	1/5
30600304AS	 30W	4000K	2500	Anthracite	300 x 77 mm	1/5



220-240 V
50-60 Hz
CRI >80



 ALU





BOL




BOL

	W	K	Lm	Colour	
30660203W	20W	3000K	1450	Matt White	1/8
30660203A	20W	3000K	1450	Anthracite	1/8
30660204W	20W	4000K	1600	Matt White	1/8
30660204A	20W	4000K	1600	Anthracite	1/8



220-240 V
50-60 Hz
CRI >80



PASCAL



PASCAL

	W	K	Lm	
30710180	18W	3000/4000/6000K	1440	1/20
30710180S	18W	3000/4000/6000K	1440	1/20

LED

SMD

|

|

220-240 V
50-60 Hz
CRI >80

SENSOR
OPTIONS

IP

44

PF

> 0,9

NO DIM

ON

OFF

> 15.000


30.000 h.

120°

DRIVER
INCL



- 3000 K
- 4000 K
- 6000 K




MAT PC · COLOUR: Blanco Mate / Matt White / Blanc Mat

SURF_{XXL}



SURF_{XXL}

		W	K	Lm	
30381003		100W	3000K	6500	1/3
LED SMD		IP 20	PF > 0,9	DIM 1-10V	ON OFF > 15.000
220-240 V 50-60 Hz CRI >80			30.000 h.	120°	DRIVER INCL



MAT PMMA · COLOUR: Blanco / White / Blanc







LINE



LINE

	W	K	Lm	L	
30110054	5W	4000K	500	311 mm	1/25
30110094	9W	4000K	900	572 mm	1/25
30110124	12W	4000K	1200	872 mm	1/25
30110164	16W	4000K	1600	1172 mm	1/25



175-240 V
50-60 Hz
CRI >80



PC · COLOUR: Blanco / White / Blanc



ACCESSORIES

30110000	Kit Power Cord 1m + Union Accessory 0.3 m <i>Kit cable conexión 1 metro + accesorio de unión 0.3 m</i>	1





WIDE



WIDE


	W	K	Lm	L	
30220184	18W	4000K	1500	600 mm	1/20
30220364	36W	4000K	3000	1200 mm	1/20



175-240 V
50-60 Hz
CRI >80



ALU · COLOUR: Blanco / White / Blanc

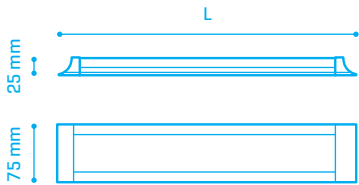



PUKHET




PUKHET

	W	K	Lm	mA	Colour	
30550093W	9W	3000K	800	250	Matt White	1/50
30550093N	9W	3000K	800	250	Matt Black	1/50
30550094W	9W	4000K	850	250	Matt White	1/50
30550094N	9W	4000K	850	250	Matt Black	1/50



220-240 V
50-60 Hz
CRI >80





ZOOM SURFACE




ZOOM SURFACE 12W

	W	K	Lm	Colour	
30540123W	12W	3000K	1150	Matt White	1/20
30540123N	12W	3000K	1150	Matt Black	1/20



220-240 V
50-60 Hz
CRI >82





TRACK LIGHT

ZOOM TRACK



ZOOM TRACK 14W

	W	K	Lm	Colour	
30280143	14W	3000K	1450	Matt White	1/20
30280144	14W	4000K	1500	Matt White	1/20
30290143	14W	3000K	1450	Matt Black	1/20
30290144	14W	4000K	1500	Matt Black	1/20




220-240 V
50-60 Hz
CRI >82



ACCESSORIES

30281400	Zoom Reflector 15° 14W	1
30291400	Zoom Reflector 24° 14W	1







ZOOM TRACK 25W

	W	K	Lm	Colour	
30280253	25W	3000K	2200	Matt White	1/20
30280254	25W	4000K	2300	Matt White	1/20
30290253	25W	3000K	2200	Matt Black	1/20
30290254	25W	4000K	2300	Matt Black	1/20




220-240 V
50-60 Hz
CRI >82



ACCESSORIES

30280015	Zoom Reflector 15° 25W	1
30280024	Zoom Reflector 24° 25W	1



ZOOM TRACK 40W

	W	K	Lm	Colour	
30280403	40W	3000K	3600	Matt White	1/10
30280404	40W	4000K	3750	Matt White	1/10
30290403	40W	3000K	3600	Matt Black	1/10
30290404	40W	4000K	3750	Matt Black	1/10




220-240 V
50-60 Hz
CRI >82



ACCESSORIES



30290015	Zoom Reflector 15° 40W	1
30290024	Zoom Reflector 24° 40W	1





TRACK 230V SURFACE



		Colour	
30440002W	TRACK 230V 3L+N Surface 2mt.	Matt White	1
30440002N	TRACK 230V 3L+N Surface 2mt.	Matt Black	
30440003W	TRACK 230V 3L+N Surface 3mt.	Matt White	1
30440003N	TRACK 230V 3L+N Surface 3mt.	Matt Black	
			
30440010W	TRACK 230V Live-End Connector	Matt White	1
30440010N	TRACK 230V Live-End Connector	Matt Black	
30440011W	TRACK 230V Central Connector	Matt White	1
30440011N	TRACK 230V Central Connector	Matt Black	
30440012W	TRACK 230V Universal Angle	Matt White	1
30440012N	TRACK 230V Universal Angle	Matt Black	
30440013W	TRACK 230V 90° Angle	Matt White	1
30440013N	TRACK 230V 90° Angle	Matt Black	
30440016W	TRACK 230V T-Joint	Matt White	1
30440016N	TRACK 230V T-Joint	Matt Black	
30440017W	TRACK 230V Suspension Kit	Matt White	1
30440017N	TRACK 230V Suspension Kit	Matt Black	
30445000W	TRACK 230V Contact Mini Joint	Matt White	1
30445000N	TRACK 230V Contact Mini Joint	Matt Black	
30445001W	TRACK 230V Closing End	Matt White	1
30445001N	TRACK 230V Closing End	Matt Black	
30440018W	TRACK 230V Mechanical Mini Joint	Matt White	1
30440018N	TRACK 230V Mechanical Mini Joint	Matt Black	



—
PENDANT
—

ZOOM PENDANT




ZOOM PENDANT 12W

	W	K	Lm	Colour	
30530123W	12W	3000K	1150	Matt White	1/20
30530123N	12W	3000K	1150	Matt Black	1/20



220-240 V
50-60 Hz
CRI >82

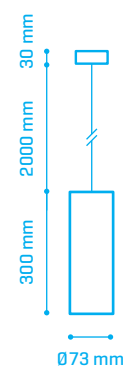



BELLY



BELLY

	L1 x L2	W	⚡	Colour	Material	📦
30432500 W	Ø250 x 210 mm	MAX 60W	E27	Matt White	Alu	1
30432500 NW	Ø250 x 210 mm	MAX 60W	E27	Matt Black / Matt White	Alu	1
30432500 NG	Ø250 x 210 mm	MAX 60W	E27	Matt Black / Gold	Alu	1
30433300 W	Ø330 x 280 mm	MAX 60W	E27	Matt White	Alu	1
30433300 NW	Ø330 x 280 mm	MAX 60W	E27	Matt Black / Matt White	Alu	1
30433300 NG	Ø330 x 280 mm	MAX 60W	E27	Matt Black / Gold	Alu	1



220-240 V
50-60 Hz



20



NO INCL



W



NW



NG




W



NW



NG

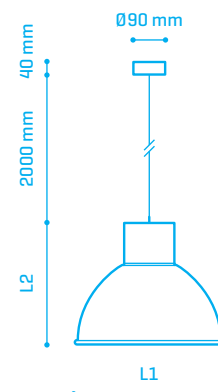







IRIS



IRIS


	L1 x L2	W		Colour	Material	
30432900 NG	Ø290 x 80 mm	MAX 60W	E27	Matt Black / Gold	Alu	1
30432900 N	Ø290 x 80 mm	MAX 60W	E27	Matt Black	Alu	1
30432900 BR	Ø290 x 80 mm	MAX 60W	E27	Brass	Polished Brass	1
30433750 NG	Ø375 x 100 mm	MAX 60W	E27	Matt Black / Gold	Alu	1
30433750 N	Ø375 x 100 mm	MAX 60W	E27	Matt Black	Alu	1
30433750 BR	Ø375 x 100 mm	MAX 60W	E27	Brass	Polished Brass	1



220-240 V
50-60 Hz



NO INCL

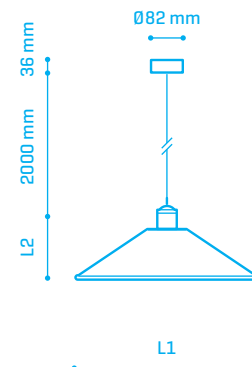



UP



UP

	L1 x L2	W	≡	Colour	Material	📦
30432000 W	Ø200 x 130 mm	MAX 60W	E27	Matt White	Alu	1
30432000 N	Ø200 x 130 mm	MAX 60W	E27	Matt Black	Alu	1
30432000 BR	Ø200 x 130 mm	MAX 60W	E27	Brass	Polished Brass	1
30432000 C	Ø200 x 130 mm	MAX 60W	E27	Copper	Polished Copper	1



220-240 V
50-60 Hz



W




N




BR



C

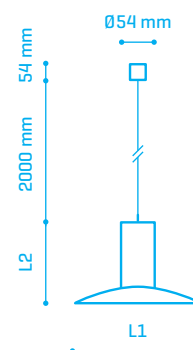

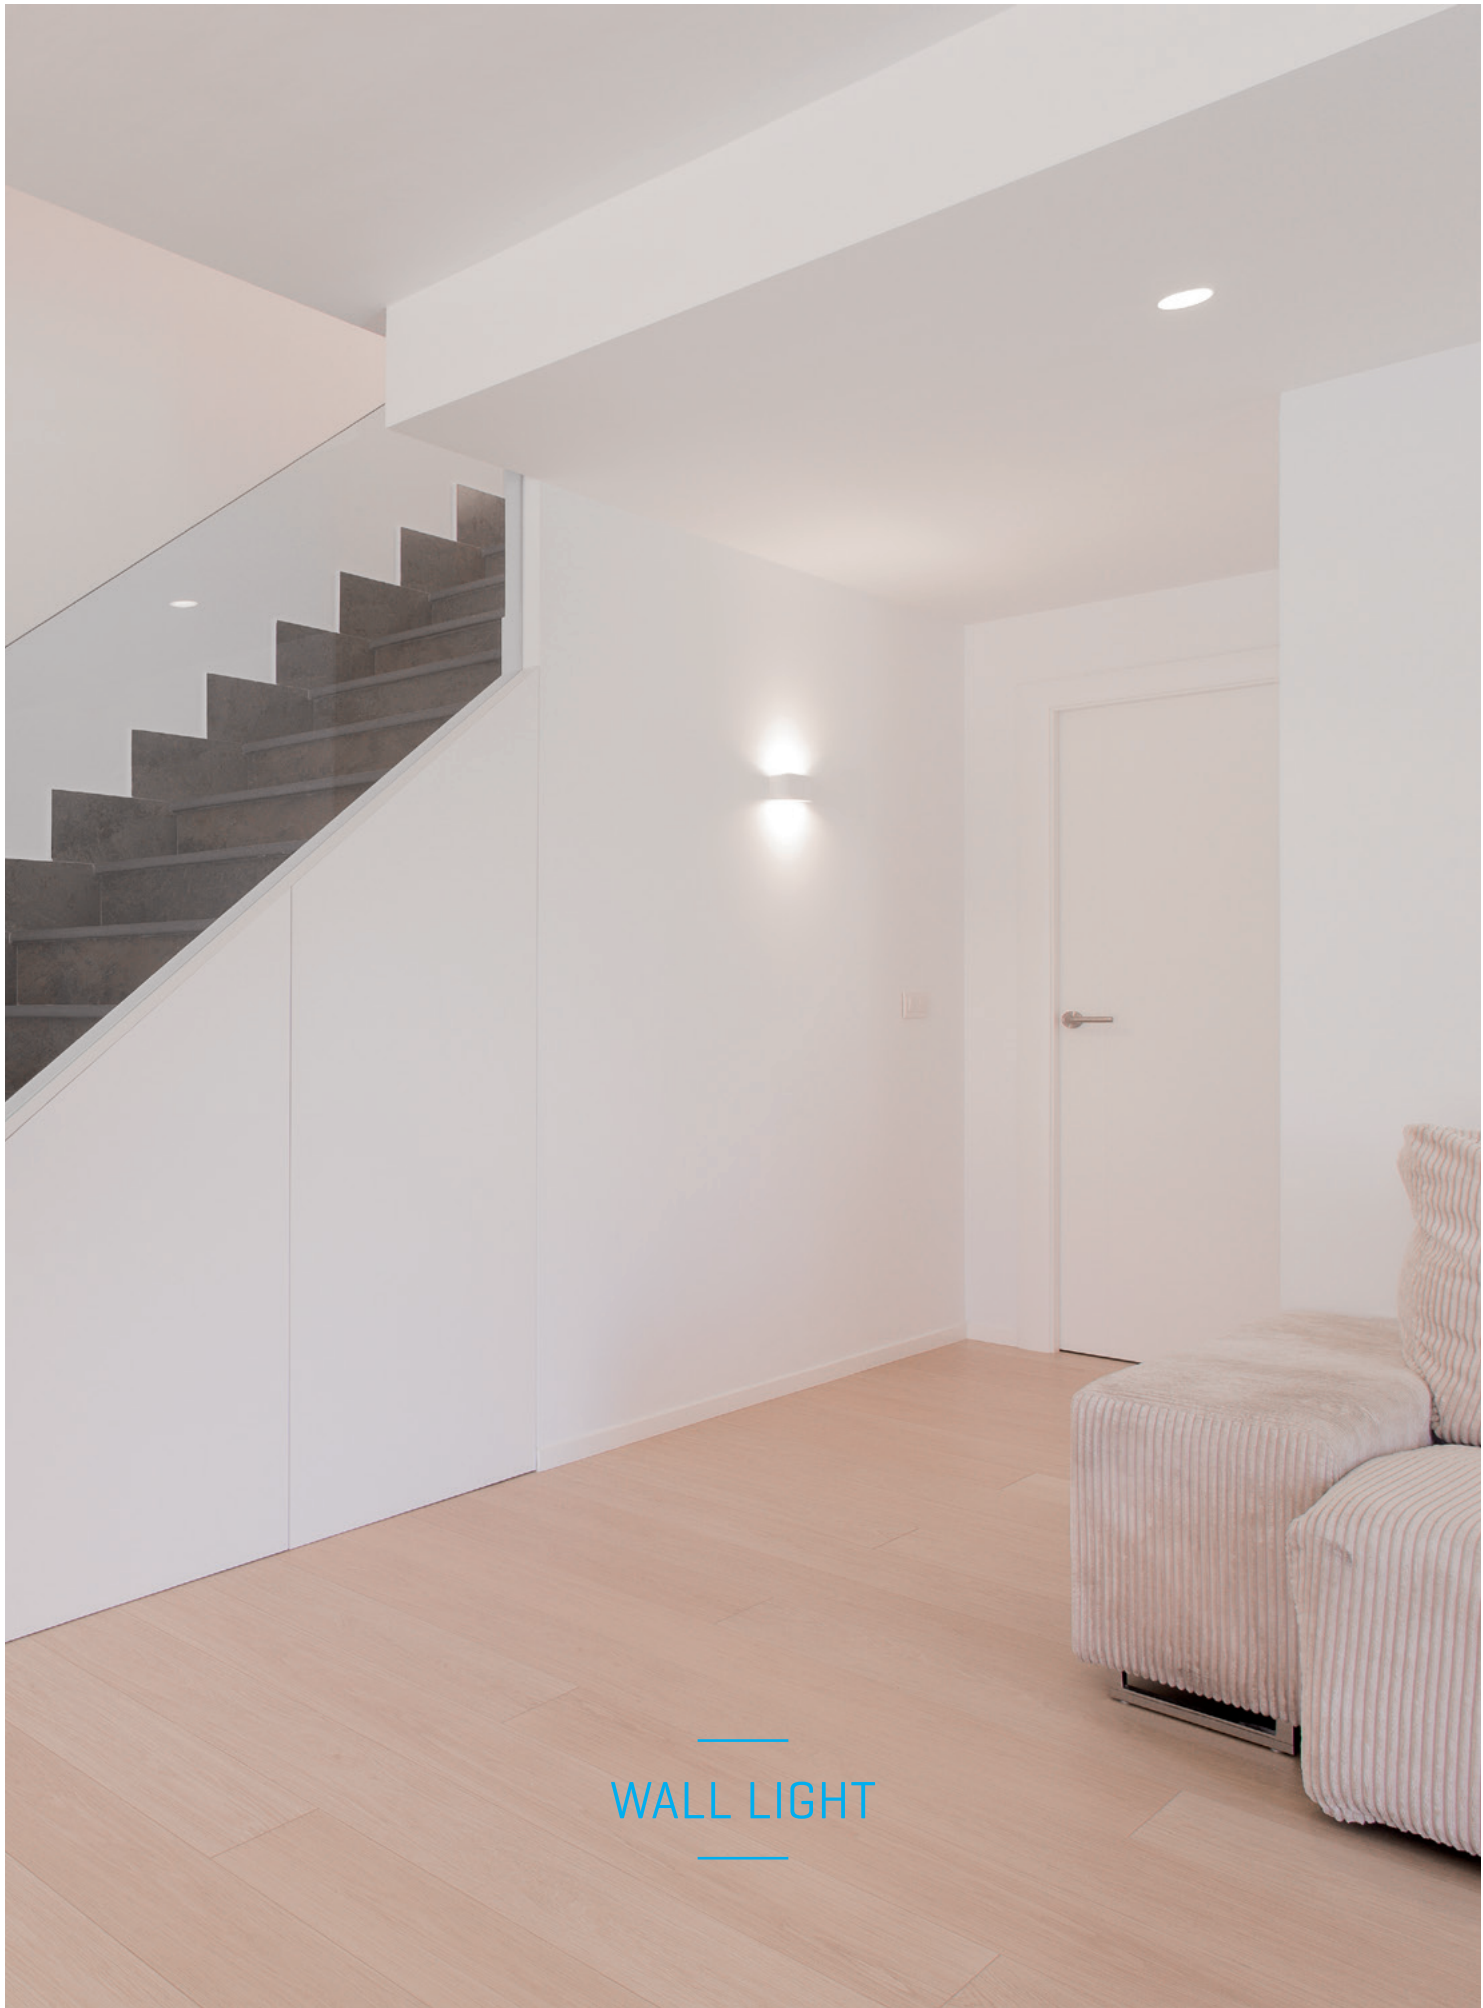

—
WALL LIGHT
—

PIXEL



PIXEL 7W

	W	K	Lm	mA	Colour	
30590073W	7W	3000K	420	180	Matt White	1/50
30590073N	7W	3000K	420	180	Matt Black	1/50

LED

C08

|

|

85-265 V

50-60 Hz

CRI >80

IP

20

NO DIM

ON


OFF

> 10.000

30.000 h.

140°

DRIVER INCL



MAT ALU




MIRAL



MIRAL

	W	K	Lm	
30730203	20W	3000	1400	1/10

LED SMD				85-260 V 50-60 Hz CRI >80		IP 44				 NO DIM > 15.000		 30.000 h.		 120°		 DRIVER INCL
------------	--	--	--	---------------------------------	--	----------	--	--	--	------------------------	--	---------------	--	----------	--	--------------------

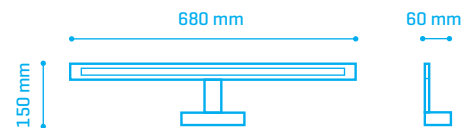

MAT INOX · COLOUR: Cromo / Chrome / Chrome




TULIP




TULIP

	W	K	Lm	
30720123	12W	3000	840	1/10

LED SMD				85-260 V 50-60 Hz CRI >80		IP 44				NO DIM				ON OFF > 15.000				30.000 h.				120°				DRIVER INCL
------------	--	--	--	---------------------------------	--	----------	--	--	--	--------	--	--	--	-----------------------	--	--	--	-----------	--	--	--	------	--	--	--	----------------

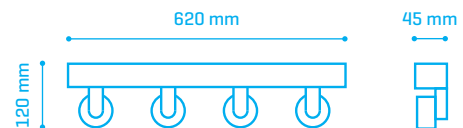

MAT INOX · COLOUR: Cromo / Chrome / Chrome

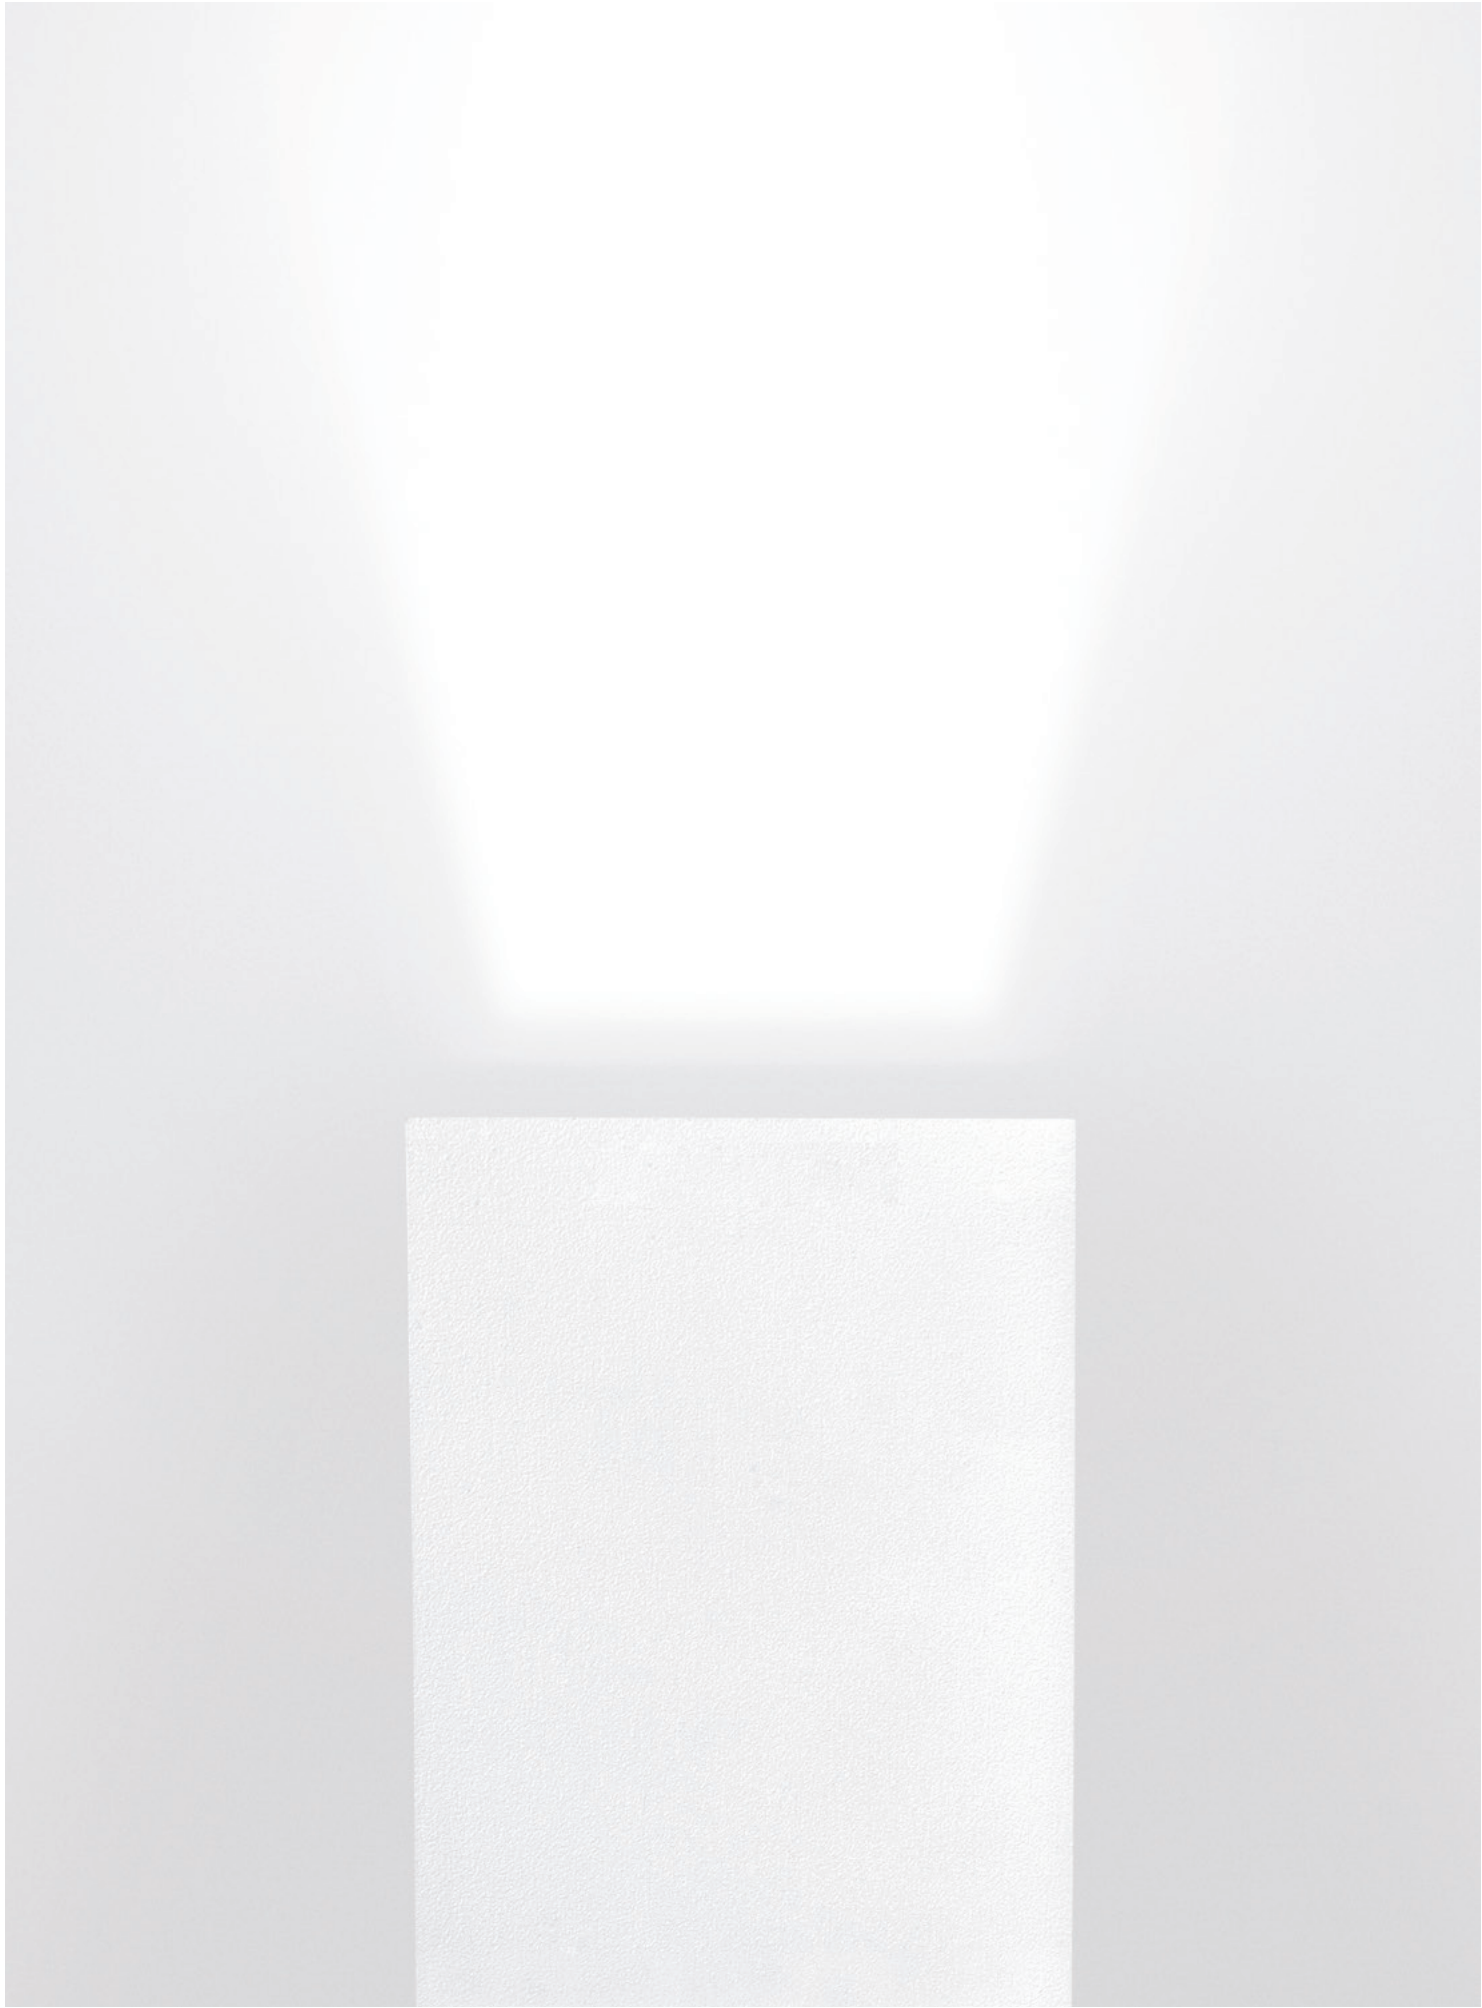

WALLY



WALLY ROUND

		W	Colour	
30510150 W	Single	MAX 1 X 50W	Matt White	1/50
30510150 N	Single	MAX 1 X 50W	Matt Black	1/50
30510250 W	Double	MAX 2 X 50W	Matt White	1/50
30510250 N	Double	MAX 2 X 50W	Matt Black	1/50



220-240 V
50-60 Hz




NO INCL



GU10-INCL




IP 20



Single

Double



WALLY SQUARE



		W	Colour	
30520150 W	Single	MAX 1 X 50W	Matt White	1/50
30520150 N	Single	MAX 1 X 50W	Matt Black	1/50
30520250 W	Double	MAX 2 X 50W	Matt White	1/50
30520250 N	Double	MAX 2 X 50W	Matt Black	1/50



220-240 V
50-60 Hz




NO INCL



GU10-INCL




IP 20



Single

Double



MAT ALU



MASK




MASK

	W	K	Lm	Colour	
30660103W	10W	3000K	750	Matt White	1/8
30660103A	10W	3000K	750	Anthracite	1/8
30660104W	10W	4000K	800	Matt White	1/8
30660104A	10W	4000K	800	Anthracite	1/8



220-240 V
50-60 Hz
CRI >80






ROOK LED




ROOK Led Single

	W	K	Lm	
30670074A	7W	4000K	525	1/36



Single




ROOK Led Double

	W	K	Lm	
30670144A	14W	4000K	1050	1/24



Double



MAT ALU · COLOUR: Antracita / Anthracite / Anthracite



ROOK




ROOK


		W	
30680010A	Single	1x50W	1/20



220-240 V
50-60 Hz



Single




		W	
30680020A	Double	2x50W	1/20



220-240 V
50-60 Hz



Double




ROOK Square


		W	
30680030A	Single	1x50W	1/20



220-240 V
50-60 Hz



Single




		W	
30680040A	Double	2x50W	1/10



220-240 V
50-60 Hz




Double






ALPHA



ALPHA SINGLE


	W	K	Lm	Colour	L1 x L2 x L3	
30620063W	6W	3000K	400	Matt White	130 x 60 x 32 mm	1/50
30620063A	6W	3000K	400	Anthracite	130 x 60 x 32 mm	1/50
30620064W	6W	4000K	450	Matt White	130 x 60 x 32 mm	1/50
30620064A	6W	4000K	450	Anthracite	130 x 60 x 32 mm	1/50
30620123W	12W	3000K	780	Matt White	220 x 72,5 x 32 mm	1/20
30620123A	12W	3000K	780	Anthracite	220 x 72,5 x 32 mm	1/20
30620124W	12W	4000K	840	Matt White	220 x 72,5 x 32 mm	1/20
30620124A	12W	4000K	840	Anthracite	220 x 72,5 x 32 mm	1/20



220-240 V
50-60 Hz
CRI >80




> 15.000



Single

ALPHA DOUBLE

	W	K	Lm	Colour	L1 x L2 x L3	
30620163W	16W	3000K	1040	Matt White	220 x 69 x 45 mm	1/16
30620163A	16W	3000K	1040	Anthracite	220 x 69 x 45 mm	1/16
30620164W	16W	4000K	1120	Matt White	220 x 69 x 45 mm	1/16
30620164A	16W	4000K	1120	Anthracite	220 x 69 x 45 mm	1/16




220-240 V
50-60 Hz
CRI >80



> 15.000



Double





KAT



KAT 3W


	W	K	Lm	Colour	L1 x L2 x L3	
30630033W	3W	3000K	150	Matt White	105 x 105 x 64 mm	1/24
30630033A	3W	3000K	150	Anthracite	105 x 105 x 64 mm	1/24
30630034W	3W	4000K	180	Matt White	105 x 105 x 64 mm	1/24
30630034A	3W	4000K	180	Anthracite	105 x 105 x 64 mm	1/24



220-240 V
50-60 Hz
CRI >80




KAT 9W

	W	K	Lm	Colour	L1 x L2 x L3	
30630093W	9W	3000K	450	Matt White	204 x 106 x 65 mm	1/12
30630093A	9W	3000K	450	Anthracite	204 x 106 x 65 mm	1/12
30630094W	9W	4000K	520	Matt White	204 x 106 x 65 mm	1/12
30630094A	9W	4000K	520	Anthracite	204 x 106 x 65 mm	1/12



220-240 V
50-60 Hz
CRI >80





FLOOR LIGHT

PIKA



PIKA


	W	K	Lm	
30690073A	7W	3000K	400	1/24
30690074A	7W	4000K	450	1/24



220-240 V
50-60 Hz
CRI >80



- Incluido
- Included
- Inclus
- Compreso
- Inklusive

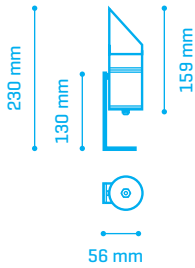

ACCESSORIES

30690000A	Pika Bracket · Soporte Pika 580mm.	1	



MAT ALU · COLOUR: Antracita / Anthracite / Anthracite




—
INDUSTRIAL
—

HYDRA




HYDRA

	W	L	
30011100	MAX 1 X 10W	670 mm	1/20
30011180	MAX 1 X 20W	1270 mm	1/12
30011240	MAX 1 X 25W	1570 mm	1/12

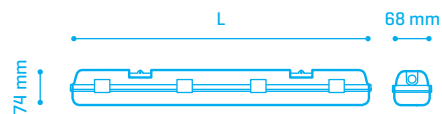

HYDRA

	W	L	
30012100	MAX 2 X 10W	670 mm	1/15
30012180	MAX 2 X 20W	1270 mm	1/10
30012240	MAX 2 X 25W	1570 mm	1/10

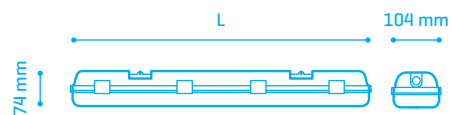

ACCESSORIES

30021000	Suspension Kit [for 2 Hydras]	1



MAT ABS + PC · COLOUR: Gris / Grey / Gris

- Para tubos de LED directo a 230V
- For LED Tubes direct 230V
- Pour tubes à LED directement en 230v
- Per tubi a LED diretto a 230V
- Für LED-Röhren direkt für Netzspannung 230V



HYDRA LED



HYDRA Led

	W	K	Lm	L1	
30021124	12W	4000K	1200	600 mm	1/20
30021126	12W	6000K	1200	600 mm	1/20
30021254	25W	4000K	2500	1200 mm	1/12
30021256	25W	6000K	2500	1200 mm	1/12
30021304	30W	4000K	3000	1500 mm	1/12
30021306	30W	6000K	3000	1500 mm	1/12



HYDRA Led

	W	K	Lm	L1	
30022254	25W	4000K	2500	600 mm	1/15
30022256	25W	6000K	2500	600 mm	1/15
30022504	50W	4000K	5000	1200 mm	1/8
30022506	50W	6000K	5000	1200 mm	1/8
30022604	60W	4000K	6000	1500 mm	1/8
30022606	60W	6000K	6000	1500 mm	1/8



ACCESSORIES

30021000	Suspension Kit [for 2 Hydras]	1

MAT PC · COLOUR: Gris / Grey / Gris





HYDRA LED LINKABLE




HYDRA Led Linkable

	W	K	Lm	L1 x L2 x L3	
30021304LK	30W	4000K	3000	1500 x 67 x 76 mm	1/12
30022504LK	50W	4000K	5000	1200 x 70 x 99 mm	1/8
30022604LK	60W	4000K	6000	1500 x 70 x 99 mm	1/8



220-240 V
50-60 Hz
CRI >80



- Conexión lineal
- Linkable
- Câblage traversant
- Collegabile
- Verknüpfbar

ACCESSORIES

30021000	Suspension Kit (for 2 Hydras)	1



PC · COLOUR: Gris / Grey / Gris

FLASH




FLASH

		W	K	Lm	L1 x L2 x L3	
30240103		10W	3000K	750	115 x 135 x 45 mm	1/50
30240104		10W	4000K	800	115 x 135 x 45 mm	1/50
30240203		20W	3000K	1500	153 x 182 x 50 mm	1/20
30240204		20W	4000K	1600	153 x 182 x 50 mm	1/20
30240303		30W	3000K	2250	193 x 225 x 55 mm	1/10
30240304		30W	4000K	2400	193 x 225 x 55 mm	1/10
30240503		50W	3000K	3750	235 x 285 x 60 mm	1/10
30240504		50W	4000K	4000	235 x 285 x 60 mm	1/10
30241003		100W	3000K	7500	285 x 340 x 78 mm	1/5
30241004		100W	4000K	8000	285 x 340 x 78 mm	1/5



85-265 V
50-60 Hz



· COLOUR: Negro Mate / Matt Black / Noir Mat




FLASH

		W	K	Lm	L1 x L2 x L3	
30241503		150W	3000K	11250	322 x 422 x 110 mm	1/3
30241504		150W	4000K	12000	322 x 422 x 110 mm	1/3
30242003		200W	3000K	15000	322 x 422 x 110 mm	1
30242004		200W	4000K	16000	322 x 422 x 110 mm	1
30243004		300W	4000K	24000	425 x 495 x 170 mm	1
30244004		400W	4000K	32000	495 x 565 x 170 mm	1



85-265 V
50-60 Hz



MAT ALU · COLOUR: Negro Mate / Matt Black / Noir Mat

STAR




STAR

			W	K	Lm	L1 x L2 x L3	
30640104N			10W	4000K	800	105 x 85 x 35 mm	1/50
30640204N			20W	4000K	1600	128 x 88 x 25 mm	1/50
30640304N			30W	4000K	2400	153 x 110 x 25 mm	1/30
30640504N			50W	4000K	4000	205 x 160 x 30 mm	1/20
30641004N			100W	4000K	8000	300 x 205 x 30 mm	1/10
30641504N			150W	4000K	12000	333 x 254 x 40 mm	1/5



220-240 V
50-60 Hz









ALU · COLOUR: Negro Mate / Matt Black / Noir Mat

TUCK




TUCK

	W	K	Lm	Colour	L1 x L2 x L3	
30250104	10W	4000K	800	Matt Black	130 x 90 x 35 mm	1/20
30260104	10W	4000K	800	Matt White	130 x 90 x 35 mm	1/20
30250204		20W	4000K	1600	Matt Black	180 x 126 x 36 mm
30260204		20W	4000K	1600	Matt White	180 x 126 x 36 mm
30250304		30W	4000K	2400	Matt Black	210 x 147 x 37 mm
30260304		30W	4000K	2400	Matt White	210 x 147 x 37 mm
30250504		50W	4000K	4000	Matt Black	260 x 182 x 41 mm
30260504		50W	4000K	4000	Matt White	260 x 182 x 41 mm



220-240 V
50-60 Hz




TUCK SENSOR



TUCK Sensor

			W	K	Lm	Colour	L1 x L2 x L3	
30360304			30W	4000K	2400	Matt Black	210 x 147 x 37 mm	1/10
30370304			30W	4000K	2400	Matt White	210 x 147 x 37 mm	1/10

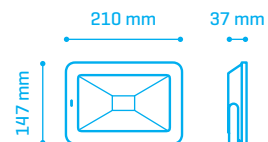

ACCESSORY

30360000	Tuck Remote Control · Mando a distancia	1
----------	---	---

- Controla tus TUCK SENSOR con un solo mando
- Control your TUCK SENSOR with one single remote control
- Contrôlez vos TUCK SENSOR avec une seule télécommande
- Controlla il tuo TUCK SENSOR con un solo telecomando
- Steuern Sie Ihre TUCK SENSOR mit einer einzigen Fernbedienung



MICROWAVE
SENSOR





SENSIBILIDAD/SENSITIVITY/SENSIBILITÉ/SENSIBILITÀ/SENSIBILITÄT




100%: 7~8 m
75%: 5~6 m
50%: 3~4 m
25%: 1~2 m

TIEMPO/TIME/TEMPS/TEMPO/ZEITEN



Duración hasta el apagado:
Duration time to light off:
Durée jusqu'à l'éteignage:
Durata fino al spento:
Dauer bis zur Abschaltung:
Min: 5 sec
Max: 24 h

MODO/MODE/MODE/MODALITÀ/MODUS



Modo día: El sensor funciona de día y de noche.
Daylight Mode: The sensor work both in day and night.
Mode Jour: Le détecteur fonctionne jour et nuit.
Modalità Giorno: Il sensore funziona giorno e notte.
Tag-Modus: Der Sensor funktioniert Tag und Nacht.



Modo Crepuscular: La luminaria se enciende automáticamente de noche, <50lux
Photocell Mode: The luminary lights on automatic in night, <50lux
Mode Crépusculaire : Le luminaire s'allume automatiquement la nuit, <50lux
Modalità Crepuscolo: Il apparecchio è acceso automaticamente durante la notte, <50lux
Dämmerungs-Modus: Die Leuchte schaltet sich Nachts automatisch ein, <50lux



Modo Manual: La luminaria está siempre encendida.
Manuel Override Mode: Keep light on all the time.
Mode manuel: Le luminaire est toujours allumé.
Modalità Manuale: Il apparecchio è sempre acceso.
Manueller Modus: Die Leuchte ist immer eingeschaltet.



Modo SOS.
SOS Mode.
Mode SOS.
Modalità SOS.
Modus SOS.



Modo Noche: El sensor sólo funciona de noche, <50lux
Nightlight Mode: The sensor work only in night, <50lux
Mode Nuit : Le détecteur fonctionne que la nuit, <50lux
Modalità Notte: Il sensore funziona soltanto di notte, <50lux
Nacht-Modus: Der Sensor funktioniert nur Nachts, <50lux




Sin Función.
Meanless Function.
Sans Fonction.
Senza Funzione.
Ohne Funktion.



Modo Flash.
Flash Mode.
Mode Flash.
Modalità Flash.
Modus Flash.



Modo Apagado.
OFF Mode.
Mode OFF.
Modalità OFF.
Modus OFF.

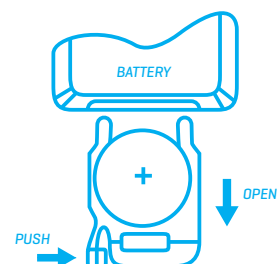




VEGA



VEGA

			W	K	Lm	Colour	L1 x L2 x L3	
30650104W			10W	4000K	800	Matt White	126 x 110 x 40 mm	1/20
30650104N			10W	4000K	800	Matt Black	126 x 110 x 40 mm	1/20
30650304W	PF		30W	4000K	2400	Matt White	154 x 180 x 40 mm	1/10
30650304N	PF		30W	4000K	2400	Matt Black	154 x 180 x 40 mm	1/10
30650504W	PF		50W	4000K	4000	Matt White	227 x 190 x 40 mm	1/10
30650504N	PF		50W	4000K	4000	Matt Black	227 x 190 x 40 mm	1/10
30651004W	PF		100W	4000K	8000	Matt White	268 x 310 x 44,5 mm	1/4
30651004N	PF		100W	4000K	8000	Matt Black	268 x 310 x 44,5 mm	1/4
30651504W	PF		150W	4000K	12000	Matt White	378 x 310 x 47,5 mm	1/3
30651504N	PF		150W	4000K	12000	Matt Black	378 x 310 x 47,5 mm	1/3
30652004W	PF		200W	4000K	16000	Matt White	444 x 333 x 50 mm	1/2
30652004N	PF		200W	4000K	16000	Matt Black	444 x 333 x 50 mm	1/2





PLANET 2



PLANET 2


	W	K	Lm	L1 x L2	
30701504	150W	4000K	19500	Ø 328 x 178 mm	1
30702004	200W	4000K	26000	Ø 388 x 196 mm	1



90-305 V
50-60 Hz
CRI >80




5 YEARS
GUARANTEE



ACCESSORIES

30700000	60° Beam Angle Lens · Lentes para ángulo de 60° 150 W	1
30700001	60° Beam Angle Lens · Lentes para ángulo de 60° 200 W	1
30700002	Surface Fixed Bracket · Soporte fijo de superficie	1



MAT ALU · COLOUR: Negro Mate / Matt Black / Noir Mat



TABLE LAMP

CLAP



CLAP SCREEN 7W

	W	K	L1	
30700007	7W	3000/4000/6000 K	330	1/16

LED
SMD

|

|

100-240 V
50-60 Hz
CRI >80

|

DIMMABLE

|

ON
OFF
> 15.000

|

40.000 h.

|

120°

|

DRIVER
INCL

3000 K

4000 K

6000 K



CLAP 9W

	W	K	L1	
30700009	9W	3000K	360	1/30

LED
SMD

|

|

100-240 V
50-60 Hz
CRI >80

|

DIMMABLE

|

ON
OFF
> 15.000

|


40.000 h.

|

120°

|


DRIVER
INCL



MAT PC · COLOUR: Blanco Mate / Matt White / Blanc Mat

LAMPS

PAR 16



SMD

	W	EQ	K	Lm	BEAM	L1 x L2		
10100062	6W	~ 50W	2700K	500	38°	Ø50 x 56	GU10	10/100
10100063	6W	~ 50W	3000K	520	38°	Ø50 x 56	GU10	10/100
10100064	6W	~ 50W	4000K	540	38°	Ø50 x 56	GU10	10/100
10110062	6W	~ 50W	2700K	500	60°	Ø50 x 56	GU10	10/100
10110063	6W	~ 50W	3000K	520	60°	Ø50 x 56	GU10	10/100
10110064	6W	~ 50W	4000K	540	60°	Ø50 x 56	GU10	10/100
10100752	7,5W	~ 50W	2700K	600	38°	Ø50 x 56	GU10	10/100
10100753	7,5W	~ 50W	3000K	620	38°	Ø50 x 56	GU10	10/100
10100754	7,5W	~ 50W	4000K	640	38°	Ø50 x 56	GU10	10/100
10110752	7,5W	~ 50W	2700K	600	60°	Ø50 x 56	GU10	10/100
10110753	7,5W	~ 50W	3000K	620	60°	Ø50 x 56	GU10	10/100
10110754	7,5W	~ 50W	4000K	640	60°	Ø50 x 56	GU10	10/100
10280752	7,5W	~ 50W	2700K	600	38°	Ø50 x 56	GU10	10/100
10280753	7,5W	~ 50W	3000K	620	38°	Ø50 x 56	GU10	10/100
10280754	7,5W	~ 50W	4000K	640	38°	Ø50 x 56	GU10	10/100
10290752	7,5W	~ 50W	2700K	600	60°	Ø50 x 56	GU10	10/100
10290753	7,5W	~ 50W	3000K	620	60°	Ø50 x 56	GU10	10/100

220-240 V
50-60 Hz
CRI >80



SMD

	W	EQ	K	Lm	BEAM	L1 x L2		
10120063	6W	~ 50W	3000K	520	100°	Ø50 x 56	GU10	10/100
10120064	6W	~ 50W	4000K	540	100°	Ø50 x 56	GU10	10/100
10120753	7,5W	~ 50W	3000K	620	100°	Ø50 x 56	GU10	10/100
10120754	7,5W	~ 50W	4000K	640	100°	Ø50 x 56	GU10	10/100

220-240 V
50-60 Hz
CRI >80




GZ10 LAMPHOLDER

10391000	GZ10 Lampholder - Portalámparas GZ10	1









220-240 V
50-60 Hz

VINTAGE









Vintage Standard

	W	K	Lm	L1 x L2		
20330402	40W	2200K	150	Ø60 x 108	E27	10/100
220-240 V 50-60 Hz	E	 DIMMABLE	 ON OFF > 6.000	 3.000 h.	 360°	 < 1 sec  FREE Hg









Vintage ST64

	W	K	Lm	L1 x L2		
20340402	40W	2200K	150	Ø64 x 145	E27	10/100
220-240 V 50-60 Hz	E	 DIMMABLE	 ON OFF > 6.000	 3.000 h.	 360°	 < 1 sec  FREE Hg



Vintage Globe

	W	K	Lm	L1 x L2		
20350402	40W	2200K	150	Ø95 x 135	E27	24
20360402	40W	2200K	150	Ø125 x 170	E27	24
220-240 V 50-60 Hz	E	 DIMMABLE	 ON OFF > 6.000	 3.000 h.	 360°	 < 1 sec  FREE Hg



STANDARD



LED FILAMENT Standard

	W	EQ	K	Lm	L1 x L2		
10200052	5W	~ 47W	2700K	630	Ø60 x 110	E27	10/100
10200062	6W	~ 60W	2700K	810	Ø60 x 110	E27	10/100
10200082	8W	~ 75W	2700K	1055	Ø60 x 110	E27	10/100

220-240 V
50-60 Hz
CRI >80



NO DIM



> 12.500



15.000 h.



360°



< 1 sec



FREE Hg



SMD Standard

	W	EQ	K	Lm	L1 x L2		
10010092	9W	~ 60W	2700K	806	Ø60 x 110	E27	10/100
10010094	9W	~ 60W	4000K	806	Ø60 x 110	E27	10/100
10010096	9W	~ 60W	6000K	847	Ø60 x 110	E27	10/100
10010122	12W	~ 75W	2700K	1055	Ø60 x 110	E27	10/100
10010124	12W	~ 75W	4000K	1055	Ø60 x 110	E27	10/100
10010126	12W	~ 75W	6000K	1107	Ø60 x 110	E27	10/100
10020122	12W	~ 75W	2700K	1055	Ø60 x 110	E27	10/100
10020124	12W	~ 75W	4000K	1055	Ø60 x 110	E27	10/100
10010142	14W	~ 100W	2700K	1521	Ø60 x 110	E27	10/100
10010144	14W	~ 100W	4000K	1521	Ø60 x 110	E27	10/100
10010146	14W	~ 100W	6000K	1597	Ø60 x 110	E27	10/100

220-240 V
50-60 Hz
CRI >80



DIMMABLE
OPTIONS



> 12.500



25.000 h.



200°



< 1 sec



FREE Hg



ECO HALOGEN Standard

	W	EQ	K	Lm	L1 x L2		
20010282	28W	~ 40W	2900K	360	Ø55 x 98	E27	10/100
20010422	42W	~ 60W	2900K	620	Ø55 x 98	E27	10/100
20010702	70W	~ 100W	2900K	1100	Ø55 x 98	E27	10/100

220-240 V
50-60 Hz



DIMMABLE



> 5.000



2.000 h.



360°



< 1 sec



FREE Hg

SPHERICAL E27



LED FILAMENT Spherical

	W	EQ	K	Lm	L1 x L2		
10220042	4W	~ 40W	2700K	470	Ø45 x 75	E27	10/100

220-240 V
50-60 Hz
CRI >80



SMD Spherical

	W	EQ	K	Lm	L1 x L2		
10040062	6W	~ 48W	2700K	560	Ø45 x 76	E27	10/100
10040064	6W	~ 48W	4000K	560	Ø45 x 76	E27	10/100
10040066	6W	~ 48W	6000K	588	Ø45 x 76	E27	10/100

220-240 V
50-60 Hz
CRI >80



ECO HALOGEN Spherical

	W	EQ	K	Lm	L1 x L2		
20040282	28W	~ 40W	2900K	360	Ø45 x 73	E27	10/100
20040422	42W	~ 60W	2900K	620	Ø45 x 73	E27	10/100

220-240 V
50-60 Hz



SPHERICAL E14



LED FILAMENT Spherical

	W	EQ	K	Lm	L1 x L2		
10210042	4W	~ 40W	2700K	470	Ø45 x 77	E14	10/100

220-240 V
50-60 Hz
CRI >80



SMD Spherical

	W	EQ	K	Lm	L1 x L2		
10030062	6W	~ 48W	2700K	560	Ø45 x 80	E14	10/100
10030064	6W	~ 48W	4000K	560	Ø45 x 80	E14	10/100
10030066	6W	~ 48W	6000K	588	Ø45 x 80	E14	10/100

220-240 V
50-60 Hz
CRI >80



ECO HALOGEN Spherical

	W	EQ	K	Lm	L1 x L2		
20030282	28W	~ 40W	2900K	360	Ø45 x 78	E14	10/100
20030422	42W	~ 60W	2900K	620	Ø45 x 78	E14	10/100

220-240 V
50-60 Hz



CANDLE



LED FILAMENT Candle

	W	EQ	K	Lm	L1 x L2		
10230042	4W	~ 40W	2700K	470	Ø35 x 98	E14	10/100

220-240 V
50-60 Hz
CRI >80



SMD Candle

	W	EQ	K	Lm	L1 x L2		
10050062	6W	~ 48W	2700K	560	Ø35 x 105	E14	10/100
10050064	6W	~ 48W	4000K	560	Ø35 x 105	E14	10/100
10050066	6W	~ 48W	6000K	588	Ø35 x 105	E14	10/100

220-240 V
50-60 Hz
CRI >80



ECO HALOGEN Candle

	W	EQ	K	Lm	L1 x L2		
20050282	28W	~ 40W	2900K	360	Ø35 x 100	E14	10/100
20050422	42W	~ 60W	2900K	620	Ø35 x 100	E14	10/100

220-240 V
50-60 Hz



DECO CANDLE



LED FILAMENT Deco Candle

	W	EQ	K	Lm	L1 x L2		
10240042	4W	~ 40W	2700K	470	Ø35 x 119	E14	10/100

220-240 V
50-60 Hz
CRI >80




ECO HALOGEN Deco Candle

	W	EQ	K	Lm	L1 x L2		
20060282	28W	~ 40W	2900K	360	Ø35 x 120	E14	10/100
20060422	42W	~ 60W	2900K	620	Ø35 x 120	E14	10/100

220-240 V
50-60 Hz



ST64



LED FILAMENT ST64

	W	EQ	K	Lm	L1 x L2	⚡	📦
10250052	5W	~ 47W	2700K	630	Ø64 x 142	E27	10/100
10250062	6W	~ 60W	2700K	810	Ø64 x 142	E27	10/100
10250082	8W	~ 75W	2700K	1055	Ø64 x 142	E27	10/100

220-240 V
50-60 Hz
CRI >80



GLOBE



SMD Globe

	W	EQ	K	Lm	L1 x L2	⚡	📦
10260102	11W	~ 78W	2700K	1100	Ø95 x 136	E27	5/20
10270152	15W	~ 105W	2700K	1600	Ø125 x 160	E27	5/20

220-240 V
50-60 Hz
CRI >80



TUBULAR



LED Tubular

	W	EQ	K	Lm	L1 x L2		
10080036	3,3W	~ 30W	6000K	300	Ø16 x 54	E14	50/500
10080043	4,5W	~ 40W	3000K	400	Ø16 x 64	E14	50/500

220-240 V
50-60 Hz
CRI >80




ECO HALOGEN Tubular

	W	EQ	K	Lm	L1 x L2		
20080282	28W	~ 40W	2900K	360	Ø25 x 85	E14	10/100

220-240 V
50-60 Hz



PAR



COB PAR 30

	W	EQ	K	Lm	L1 x L2		
10090104	10W	~ 56W	4000K	750	Ø95 x 91	E27	6/24

220-240 V
50-60 Hz
CRI >80




COB PAR 38

	W	EQ	K	Lm	L1 x L2		
10090154	15W	~ 85W	4000K	1200	Ø121 x 133	E27	6/24

220-240 V
50-60 Hz
CRI >80



REFLECTOR



SMD REFLECTOR E14

	W	EQ	K	Lm	L1 x L2	≡	📦
10070033	3,5W	~ 25W	3000K	250	Ø39 x 70	E14	10/100
10070053	5,5W	~ 40W	3000K	470	Ø50 x 86	E14	10/100

220-240 V
50-60 Hz
CRI >80




SMD REFLECTOR E27

	W	EQ	K	Lm	L1 x L2	≡	📦
10070083	8W	~ 51W	3000K	600	Ø63 x 105	E27	10/100
10070123	12W	~ 71W	3000K	1000	Ø80 x 110	E27	5/20
10070153	15W	~ 96W	3000K	1350	Ø90 x 120	E27	5/20

220-240 V
50-60 Hz
CRI >80



LINEAR 78



SMD Linear 78

	W	EQ	K	Lm	L1 x L2	Beam	Box
10130053	5W ~ 43W		3000K	500	Ø24 x 78	R7s	10/100
10130054	5W ~ 43W		4000K	500	Ø24 x 78	R7s	10/100

220-240 V
50-60 Hz
CRI >80




ECO HALOGEN Linear 78

	W	EQ	K	Lm	L1 x L2	Beam	Box
20130802	80W ~ 100W		2900K	1380	Ø8 x 78	R7s	50/500
20131202	120W ~ 150W		2900K	2220	Ø8 x 78	R7s	50/500

220-240 V
50-60 Hz



LINEAR 118



SMD Linear 118

	W	EQ	K	Lm	L1 x L2	⚡	📦
10140083	8,5W ~ 71W		3000K	1000	Ø24 x 118	R7s	10/100
10140084	8,5W ~ 71W		4000K	1000	Ø24 x 118	R7s	10/100
10150083	8W ~ 68W	🕒	3000K	800	Ø24 x 118	R7s	10/100

220-240 V
50-60 Hz
CRI >80



DIMMABLE
OPTIONS

> 12.500

25.000 h.

360°

< 1 sec

FREE Hg



ECO HALOGEN Linear 118

	W	EQ	K	Lm	L1 x L2	⚡	📦
20141202	120W ~ 150W		2900K	2220	Ø8 x 118	R7s	50/500
20141602	160W ~ 200W		2900K	3100	Ø8 x 118	R7s	50/500
20142302	230W ~ 300W		2900K	4650	Ø8 x 118	R7s	50/500
20144002	400W ~ 500W		2900K	8550	Ø8 x 118	R7s	50/500

220-240 V
50-60 Hz



DIMMABLE

> 5.000


2.000 h.

360°

< 1 sec

FREE Hg

G9



LED HIGH VOLT G9

	W	EQ	K	Lm	L1 x L2	W	W
10180023	2,5W ~ 18W		3000K	180	Ø16 x 48	G9	50/500
10180024	2,5W ~ 18W		4000K	180	Ø16 x 48	G9	50/500

220-240 V
50-60 Hz
CRI >80



LED HIGH VOLT G9

	W	EQ	K	Lm	L1 x L2	W	W
10180043	4,5W ~ 40W		3000K	400	Ø16 x 62	G9	50/500
10180044	4,5W ~ 40W		4000K	400	Ø16 x 62	G9	50/500

220-240 V
50-60 Hz
CRI >80




ECO HALOGEN HIGH VOLT G9

	W	EQ	K	Lm	L1 x L2	W	W
20180282	28W ~ 40W		2900K	360	Ø15 x 42	G9	100/1000
20180422	42W ~ 60W		2900K	620	Ø15 x 42	G9	100/1000

220-240 V
50-60 Hz



G4



LED BIPIN G4

	W	EQ	K	Lm	L1 x L2	⚡	📦
10170013	1,2W ~ 11W		3000K	100	Ø12 x 32	G4	50/500
<div> <div>AC/DC 12 V 50-60 Hz CRI >80</div> <div>A+</div> <div>NO DIM</div> <div>ON OFF > 12.500</div> <div>25.000 h.</div> <div>300°</div> <div>< 1 sec</div> <div>FREE Hg</div> </div>							

ECO HALOGEN BIPIN G4


	W	EQ	K	Lm	L1 x L2	⚡	📦
20170142	14W ~ 20W		2900K	145	Ø8 x 32	G4	100/1000
<div> <div>AC/DC 12 V 50-60 Hz</div> <div>C</div> <div>DIMMABLE</div> <div>ON OFF > 5.000</div> <div>2.000 h.</div> <div>360°</div> <div>< 1 sec</div> <div>FREE Hg</div> </div>							

G6,35




ECO HALOGEN BIPIN G6,35

	W	EQ	K	Lm	L1 x L2	⚡	📦
20170282	28W ~ 40W		2900K	360	Ø13 x 45	G6,35	100/1000
20170352	35W ~ 50W		2900K	400	Ø13 x 45	G6,35	100/1000
<div> <div>AC/DC 12 V 50-60 Hz</div> <div>C</div> <div>DIMMABLE</div> <div>ON OFF > 5.000</div> <div>2.000 h.</div> <div>360°</div> <div>< 1 sec</div> <div>FREE Hg</div> </div>							

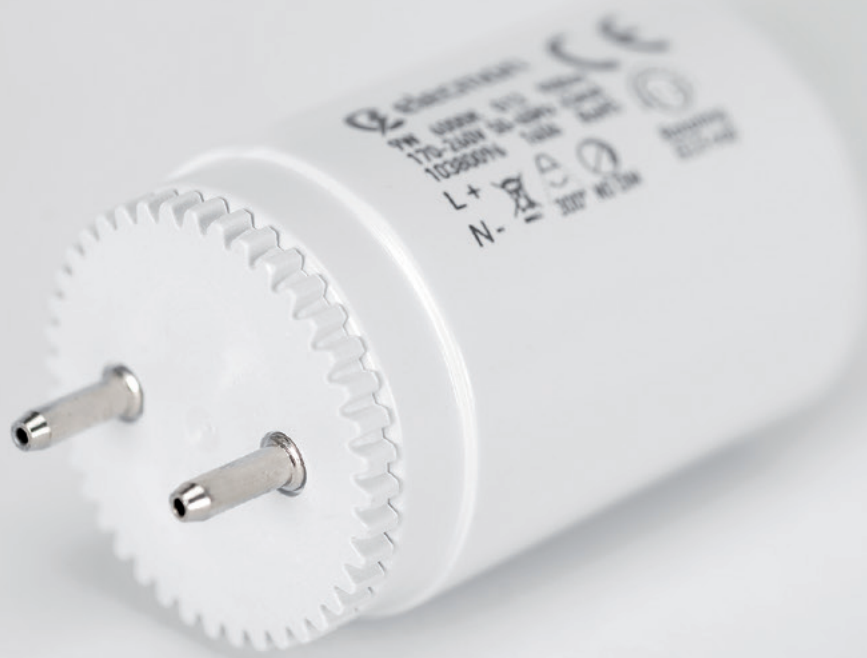

LED
175-240V AC
10350094
L+
N-
CE
RoHS
WEEE

TUBE



LED TUBE

	W	EQ	K	Lm	L1 x L2	W	EQ
10380094	9W	~ 18W	4000K	900	Ø28 x 604	G13	25
10380096	9W	~ 18W	6000K	900	Ø28 x 604	G13	25
10380184	18W	~ 36W	4000K	1800	Ø28 x 1213	G13	25
10380186	18W	~ 36W	6000K	1800	Ø28 x 1213	G13	25
10380244	24W	~ 58W	4000K	2400	Ø28 x 1514	G13	25
10380246	24W	~ 58W	6000K	2400	Ø28 x 1514	G13	25

170-260 V
50-60 Hz
CRI >80



MAT GLASS

· INSTALACIÓN TUBO DE LED PARA SUSTITUCIÓN TUBO FLUORESCENTE.

1. Retirar tubo fluorescente, cebador y reactancia interna.
2. Alimentar el tubo de LED a 240V por el extremo indicado, tal y como se muestra en la imagen inferior.

· LED TUBE INSTALLATION FOR FLUORESCENT TUBE SUBSTITUTION.

1. Remove fluorescent tube, starter and ballast.
2. Supply with 240V current at the marked side of the LED tube, as shown in below image.

· INSTALLATION D'UN TUBE LED POUR REMPLACER UN TUBE FLUORESCENT.



1. Retirer le tube fluorescent, le starter et le ballast.
2. Alimenter en 240V à l'extrémité indiquée du tube LED, en suivant les instructions de l'image ci-dessous.

· INSTALLAZIONE TUBO LED PER SOSTITUZIONE DEL TUBO FLUORESCENTE.

1. Rimuovere il tubo fluorescente, il starter e il alimentatore interno.
2. Alimentare il tubo LED a 240V per la estremità indicata, come illustrato nell'immagine sottostante.

· INSTALLATIONSANLEITUNG ZUM AUSTAUSCH EINER LEUCHTSTOFFRÖHRE DURCH EINE LED-RÖHRE.

1. Entnehmen Sie die Leuchtstoffröhre, den Starter und das Vorschaltgerät.
2. Speisen Sie die LED-Röhre mit 240V am gekennzeichneten Ende der Röhre, so wie im unteren Bild gezeigt.

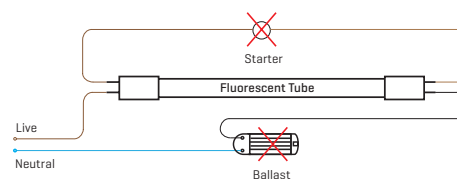

LED STRIP LIGHTS &
ACCESSORIES

Led Strip Light



Flexible Led Strip Light

		D	V	W	IP	LED/m	✂	K	Lm/m	📦
30452003	LED STRIP LIGHT SMD2835	5m x 8mm	24V	4,4W	IP20	60 LED/m	10 cm	2800K-3200K	360-400 Lm/m	1/40
30452004	LED STRIP LIGHT SMD2835	5m x 8mm	24V	4,4W	IP20	60 LED/m	10 cm	6000K-6500K	360-400 Lm/m	1/40
30456503	LED STRIP LIGHT SMD2835	5m x 8mm	24V	4,4W	IP65	60 LED/m	10 cm	2800K-3200K	360-400 Lm/m	1/40
30456504	LED STRIP LIGHT SMD2835	5m x 8mm	24V	4,4W	IP65	60 LED/m	10 cm	6000K-6500K	360-400 Lm/m	1/40
30462003	LED STRIP LIGHT SMD2835	5m x 8mm	24V	9,6W	IP20	120 LED/m	5 cm	2800K-3200K	720-800 Lm/m	1/40
30462004	LED STRIP LIGHT SMD2835	5m x 8mm	24V	9,6W	IP20	120 LED/m	5 cm	6000K-6500K	720-800 Lm/m	1/40
30466503	LED STRIP LIGHT SMD2835	5m x 8mm	24V	9,6W	IP65	120 LED/m	5 cm	2800K-3200K	720-800 Lm/m	1/40
30466504	LED STRIP LIGHT SMD2835	5m x 8mm	24V	9,6W	IP65	120 LED/m	5 cm	6000K-6500K	720-800 Lm/m	1/40
30472003	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP20	60 LED/m	10 cm	2800K-3200K	1250-1350 Lm/m	1/40
30472004	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP20	60 LED/m	10 cm	4000K-4500K	1250-1350 Lm/m	1/40
30472006	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP20	60 LED/m	10 cm	6000K-6500K	1250-1350 Lm/m	1/40
30476503	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP65	60 LED/m	10 cm	2800K-3200K	1250-1350 Lm/m	1/40
30476504	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP65	60 LED/m	10 cm	4000K-4500K	1250-1350 Lm/m	1/40
30476506	LED STRIP LIGHT SMD5630	5m x 10mm	24V	14,4W	IP65	60 LED/m	10 cm	6000K-6500K	1250-1350 Lm/m	1/40
30482008	LED STRIP LIGHT SMD5050	5m x 10mm	24V	8,6W	IP20	60 LED/m	10 cm	🌈 RGB	400-420 Lm/m	1/40
30486508	LED STRIP LIGHT SMD5050	5m x 10mm	24V	8,6W	IP65	60 LED/m	10 cm	🌈 RGB	400-420 Lm/m	1/40




3M Adhesive · Adhesivo 3M

Profiles




LED STRIP LIGHT PROFILE KIT. Recessed

	Length	
30500100	5 x 2 m	10 m




LED STRIP LIGHT PROFILE KIT. Slim Recessed

	Length	
30500200	5 x 2 m	10 m




LED STRIP LIGHT PROFILE KIT. Surface

	Length	
30500500	5 x 2 m	10 m



LED STRIP LIGHT PROFILE KIT. Corner

	Length	
30500700	5 x 2 m	10 m



 ALU

Accessories

RGB Touch-Sensitive Wireless Controller



30485000

Controlador RGB Táctil Inalámbrico



1



Constant Voltage Led Power Supply



V

W

D



30470050

Fuente Alimentacion

24V

MAX 50W

99 x 82 x 30 mm

1

30470100

Fuente Alimentacion

24V

MAX 100W

129 x 97 x 30 mm

1

30470150

Fuente Alimentacion


24V

MAX 150W

159 x 97 x 30 mm

1



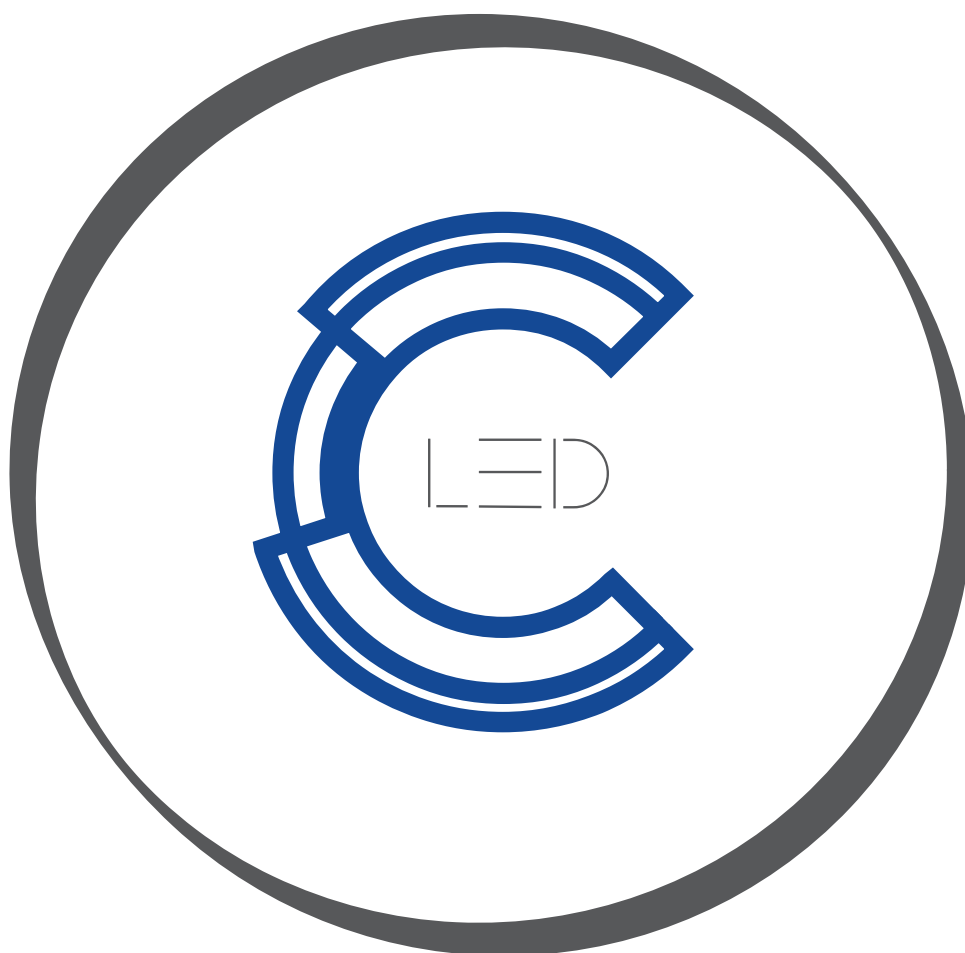

CONNECTILED
96 Bis rue des Cicottées
37550 Saint-Avertin

WWW.CONNECTILED.COM

Nous suivre sur les réseaux

